

Makita®

April 2019 Edition



COMPLETE Industrial Power
Tool Catalogue

Index

2		DHP485Z	7	FS6300		35	LW1401		23	
2012NB		30	DHP482ZJ	7	G		M			
4			DHP482RFE	7	GA4534		20	MLT100		24
4107R		24	DHP458ZK	7	GA4540		20	N		
4114S		24	DHP481ZK	7	GA5010		20	N5900B		26
4131		23	DHR202ZK	8	GA5040		20	P		
4329K		28	DHR280ZJ	11	GA5040C		20	PC5001C		26
4350FCT		28	DHR263ZK	11	GA7010C		20			20
4351FCT		28	DHR400ZK	13	GA7020		20	PJ7000		R
5			DHS680ZJ	8	GA9010C		20	RBC411U		37
5143R		23	DHS710Z	11	GA9020		20	RBC413U		37
5903RK		23	DJN161Z	10	GA9020K		20	RP0900		34
6			DJR183Z	8/37	GA9040SK01		20	RP1800X		34
6300-4		26	DJR186ZK	8	GA9050		20	RP2301FCX		34
6411		26	DJR187ZK	8	GA9060		20	RT0700C		34
6906		35	DJV180ZK	8	GB602		20	RT0700CX2		34
8			DJV181ZJ	8	GD0600		26	S		
8406		26	DJV182ZK	8	GD0603		26	SG1251J		24
9			DKP180Z	9	GD0800C		26	SK104Z		35
9031		20	DLM380DZ	13/38	GD0801C		26	SP6000J		22
9032		20	DLM460/1Z	13/38	GD0810C		26	T		
9046		29	DLS714Z	13	GD0811C		26	TD0101F		26
9237CB		34	DLS714Z	11	GS5000		20	TD110DZ		17
9401		22	DML800	10	H			TM3000CX2		29
9403		22	DML802	10	HG551VK		22	TW0200		35
9557HNG		20	DML801	10	HM0870C		33	TW0350		35
9558HP		20	DML807	10	HM1203C		33	TW1000		35
A			DML805	10	HM1307C		34	U		
ADP05		10	DP2010	26	HM1802		34	UB1102		22
AF505		23	DP4002	26	HM1812		34	UB1103		22
AF600		23	DPJ180ZJ	6	HP1230		26	UC4041A		36
B			DPT351Z	9	HP1630		28	UC4051A		37
BL1016		17	DRC200Z	3	HP1640		26	UH6570		38
BL1041B		17	DRT50ZJ	9	HP2010N		28			
BL1815N		5	DRT50ZJX2	9	HP2050		28			
BL1830B		5	DS4012	26	HP2051		28			
BL1850B		5	DSP600ZJ	11	HP2070		28			
BL1860B		5	DSS610ZK	6	HR2230		30			
BO3710		29	DST221Z	9	HR2300		30			
BO4555		29	DTD152Z	8	HR2460		30			
BO4900		29	DTD153ZJ	8	HR2470		30			
BO5031		29	DTD154Z	8	HR2470T		30			
BO5041		30	DTD171ZJ	8	HR2475		30			
BO6030		30	DTM50Z	6	HR2600		33			
BO6050J		30	DTW190ZK	8	HR2630		33			
C			DTW251ZK	9	HR2631F		33			
CC301DZJ		17	DTW285ZK	9	HR2810		33			
D			DTW450ZK	9	HR3200C		33			
DA3010F		26	DTW1001ZJ	9	HR4002		33			
DA4031		26	DTW1002ZJ	9	HR4003C		33			
DBO180Z		9	DUB182Z	6	HR4013C		33			
DC105B		17	DUB183Z	6/38	HR5212C		33			
DC18RC		5	DUB361Z	13/38	HS7601		23			
DC18RD		5	DUB362Z	13/38	HS0600		23			
DC18SE		5	DUC122Z	6/37	J					
DCG180ZK		7	DUC302Z	11/37	JN1601		29			
DCF102Z		11	DUC400ZB	11/37	JN3201J		29			
DCL180Z		3	DUH523Z	10/38	JR3070CT		28			
DCO180Z		6	DUH651Z	13/38	JS1601		29			
DCS551Z		6	DUM604Z	10/37	JS1602		29			
DCU180Z		38	DUR181Z	10/37	JS3201J		29			
DDA350ZK		7	DUR187Z	10/37	JV0600K		28			
DDF083Z		7	DUR364LZ	13/37	K					
DDF483ZJ		7	DUR365UZ	13/37	KP0800K		33			
DF331DZ		17	DVC261Z	3	KP0810K		33			
DF332DSYE		17	DVC350Z	3	L					
DFS250ZJ		7	DVC860LZ	3	LB1200F		20			
DFR550ZJ		7	DVC862LZ	3	LC1230		23			
DGA452ZK		6	E		LD050P		35			
DGA456ZJ		6	EA3502S	36	LD080PI		35			
DGA458ZJ		6	EA4301F	36	LF1000		24			
DGA900ZK		11	F		LS0815FL		24			
DGD800Z		8	FS2300	34	LS1040		24			
DHP453ZK		7	FS2500	35	LS1018L		24			
DHP453RYE		7	FS2700	35	LS1019L		24			
			FS4300	34	LS1219L		24			

Vacuum Cleaners
Dust Extraction



Cordless Tools
18V



Cordless Tools
18V + 18V



Cordless Tools
12V max



Grinding /
Sanding




Sawing



Cutting
(New material /
Masonry)



Drilling



Sanding



Demolition



Outdoor Power
Equipment





Makita's Intelligent Robotic Cleaner

provides tomorrow's advanced cleaning today for office buildings, warehouses or stores.

DRC200Z

Cordless Robotic Cleaner

LXT BL Brushless Robotic Cleaner.

Automatic Cleaning thanks to many sensors with selectable two running modes:
Random Mode Cleaning
Pattern Mode Cleaning.



SPECIFICATIONS

Continuous use (minutes)	With BL1850B x 2: 200
Max cleaning area	With BL1850B x 2: 500 m ²
Max running speed	0.3 m/sec
Dust Box Capacity	2.5L
Net weight	7.3kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DVC862LZ

Cordless Vacuum Cleaner

Delivers up to 40min of run time using BL1850B.



SPECIFICATIONS

Capacity	Dust / Water: 8 / 6 L
Continuous Use (min.)	With BL1850B x 2: 40
Max Air Flow:	2.1 m ³ /min
Max Sealed Suction	9.8 kPa
Suction Power:	90 W
Net Weight	7.0 kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DVC261Z

Cordless Backpack Vacuum Cleaner

Delivers up to 140min of run time using BL1860B on normal setting.



SPECIFICATIONS

Capacity	Filter bag / Paper dust bag: 2.0 / 2.0 L
	Cloth dust bag: 1.5L
Continuous Use (min.)	With BL1860B
	Max / High / Normal: 40 / 75 / 140
Max Air Flow	1.5:2.3 m ³ /min
Max Sealed Suction	11 kPa
Suction Power	Max / High / Normal: 85 / 45 / 25 W
Net weight	3.8 kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DVC350Z

Cordless Dust Extractor

***Not for small particles like concrete / masonry dust.**

Runtime: High - 13min Low - 26min (3.0Ah)

SPECIFICATIONS

Max. Peak Air Flow	3.4 m ³ /min
Max. Sealed Suction	5.5 kPa
Recoverable Capacity	Dust: 3.0L
Net weight	2.2 kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DVC860LZ

Cordless Vacuum Cleaner

Powered by AC and two 18V Li-Ion batteries in series.

Powerful 1,050W motor generates 3.6 m³/min of Max air ow / 24 kPa of Max sealed suction / 320W of Suction power.

SPECIFICATIONS

Capacity	Dust / Water: 8 / 6 L
Continuous Use (min.)	With BL1850B x 2: 65
Max Air Flow AC / DC:	3.6 / 2.1 m ³ /min
Max Sealed Suction	AC / DC: 24 / 9 kPa
Suction Power AC/ DC:	320 / 25-70 W
Net Weight	8.6 kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DCL180Z

Cordless Dust Extractor

Optimum cleaner for a variety of applications.

SPECIFICATIONS

Capacity	650mL
Continuous Use	20min on full 3.0Ah battery
Max. Air Flow	1.3 m ³ /min
Max. Sealed Suction	3.6 kPa
Net weight	1.2 kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5








18V

* Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

▣ **CORDLESS TOOLS** **LXT**



Li-Ion Battery & Charger Time Reference, Compatibility Chart

18V Lithium-ion		DC18RC Fast Charger	DC18SE Automotive Charger
6.0 Ah	 BL1860B (197422-4) *BL1860B with Battery Fuel Gauge*	WITH DC18RC 55 min. Fast Charging	WITH DC18SE 130 min.
5.0 Ah	 BL1850B (197280-8) *BL1850B with Battery Fuel Gauge*	45 min. Fast Charging	110 min. SAME CHARGING TIME AS WITH DC18RC.
3.0 Ah	 BL1830B (197599-5) *BL1830B with Battery Fuel Gauge*	22 min. Fast Charging	60 min.
1.5 Ah	 BL1815N (632A54-1)	15 min. Fast Charging	30 min.
		No discharging required  Shock Absorbing Heavy Duty Pack  Longtime Storage Low Self Discharge 	

710%

Extreme Stamina (5.0Ah)

Life time work volume

The figure is a relative value when the amount of Ni-Cd 1.9Ah is indexed at 100.

The built-in CPU in battery records the battery usage history and transmits it to the charger.



Digital Communication



Built-in CPU

The CPU built in the charger analyzes its condition; high temperature, re-charge after full charged, over-discharging. The battery lasts long life because it can be charged at the best method and time.




40%Lighter



MAKITA
18V
Ni-MH 2.8Ah

MAKITA
18V Li-ion 5.0Ah



Firm Holding

Multi-contact terminals reduce electrical resistance and increase connection stability withstanding against vibration, and ultimately ensures Stable current supply to the tool.



CORDLESS TOOLS 18V LXT LITHIUM-ION

DGA452ZK 115mm Cordless Angle Grinder



Powerful angle grinder now free from cord.

SPECIFICATIONS

Max. Capacities (dia.)	
Depressed Centre Wheel	115mm
Abrasive Disc	115mm
Diamond Wheel	115mm
No Load Speed	11,000 r/min
Net Weight	1.9kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DGA456ZJ 115mm Cordless Angle Grinder

Battery fuel gauge.



SPECIFICATIONS

Max. Capacities (dia.)	
Depressed Centre Wheel	115mm
Abrasive Disc	115mm
Diamond Wheel	115mm
No Load Speed	8,500 r/min
Net Weight	2.3kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DGA458ZJ 115mm Cordless Angle Grinder

BL MOTOR BRUSHLESS

Automatic Speed Control adjusts speed and torque during operation for optimum performance.



SPECIFICATIONS

Wheel Diameter	115mm
No Load Speed	8,500 r/min
Net Weight	2.4kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DSS610ZK 165mm Cordless Circular Saw

Lightweight and compact design.

With TCT saw blade.



SPECIFICATIONS

Blade Diameter	165mm
Bore Size	20mm
Max. Cutting Capacity	
At 0°	57mm
At 45°	40mm
At 50°	36mm
No Load Speed	3,700 r/min
Net Weight	3.5kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DHS680ZJ 165mm Cordless Circular Saw

High-efficiency Brushless motor provides higher power and more work amount.

BL MOTOR BRUSHLESS



SPECIFICATIONS

Blade Diameter	165mm
Max. Cutting Capacity	
At 0°	57mm
At 45°	41mm
At 50°	37mm
No Load Speed	5,000 r/min
Net Weight	3.1kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DCS551Z 150mm Cordless Metal Cutter

Automatic speed control.

BL MOTOR BRUSHLESS



SPECIFICATIONS

Blade Diameter	150mm
Max. Cutting Capacity	57.5mm
No Load Speed	3,900 r/min
Net Weight	2.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DPJ180ZJ Cordless Biscuit Joiner

Excellent tool control.



SPECIFICATIONS

Blade Diameter	100mm
Max. Cutting Depth	20mm
No Load Speed	6,500 r/min
Net Weight	3.0kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DUB182Z Cordless Blower

High / Medium / Low Air volume settings.



SPECIFICATIONS

Air Volume	2.6m ³ /min
Air Speed	80m/s
Air Pressure	5.4kpa
No Load Speed	0-18,000 r/min
Net Weight	1.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DUB183Z Cordless Blower

Long leaf blower nozzle with curve at end enables you to use the machine comfortably in an upright standing posture.



SPECIFICATIONS

Air Volume	2.6m ³ /min
Air Speed	52m/s
No Load Speed	0-18,000 r/min
Net Weight	1.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DUC122Z Cordless Chain Saw

Low noise level and zero emissions for operator comfort.



SPECIFICATIONS

Guide Bar Length	115mm
Chain Pitch	1/4"
Chain Gauge	1.3mm
Chain Speed	5.0m/s
Chain Oil Tank Volume	80 mL
Net Weight	2.6kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DCO180Z Cordless Cut-Out Tool

High rotational speed for fast cutting. Anti-restart function.



SPECIFICATIONS

Capacity Collet	3.18mm
No Load Speed	30,000 r/min
Net Weight	1.4kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DTM50Z Cordless Multi Tool

Wide selection of accessories available for various applications.



SPECIFICATIONS

Oscillations per Minute	6,000 - 20,000
Net Weight	1.8kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3



DGD800Z Cordless Die Grinder

Compact barrel grip design and weighs only 1.7kg with battery for easy handling.



SPECIFICATIONS

Collet Capacity	6mm
Wheel Diameter	38mm
No Load Speed	26,000 r/min
Net weight	1.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3



CORDLESS TOOLS 18V LXT LITHIUM-ION

DCG180ZK

Cordless Caulking Gun

Variable speed control for maximum control of sealant flow rate.

Sealant not included
*Standard with 300ml holder.

Anti-drip function.

SPECIFICATIONS

Max Pushing Force	5,000N
No Load Speed	0-28mm/sec
Net Weight	2.1kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V

DDA350ZK 10mm

Cordless Angle Drill

Compact angle head with small head height.

SPECIFICATIONS

Capacities	
Steel	10mm
Wood	25mm
No Load Speed	0-1,800r/min
Net Weight	1.5kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

CB440 18V

DFS250ZJ

Cordless Screwdriver

Ideal for decking operation.
Ultra-high efficiency comparable to AC screwdrivers.

SPECIFICATIONS

Capacity	
Self-Drilling Screw	6mm
Drywall Screw	5mm
Driving Shank	6.35mm
No Load Speed	0 - 2,500r/min
Net Weight	1.6kg

Li-Ion 6.0 5.0 4.0 3.0 1.5

18V

DFR550ZJ

Cordless Auto Feed Screwdriver

Ideal for drywall and subfloors.



SPECIFICATIONS

Capacity	
Drywall Screw	4x25 - 55mm
Hex Shank	6.35mm
No Load Speed	4,000r/min
Net Weight	2.1kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DDF083Z 13mm

Cordless Driver Drill

40Nm

Ultra-compact and ergonomic design.



SPECIFICATIONS

Capacity	
Steel	13mm
Wood	36mm
Chuck Capacity	6.35mm
No Load Speed	Hi: 0-1,700 r/min Lo: 0-500 r/min
Maximum Torque	Hard: 40Nm Soft: 23Nm
Net Weight	1.1kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DDF483ZJ

Cordless Driver Drill

40Nm



SPECIFICATIONS

Capacity	
Steel:	13mm
Wood:	36mm
Chuck capacity	1.5 - 13mm
No Load Speed	High / Low: 0 - 1,700 / 0 - 500r/min
Max Fastening Torque	Hard / Soft: 40 / 23Nm
Max Lock Torque	40Nm
Net Weight	1.3kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V

DHP453ZK 13mm

Cordless Impact Driver Drill

42Nm

Extremely compact tool size.

SPECIFICATIONS

Capacity	
Steel	13mm
Wood	36mm
Masonry	13mm
Impacts per Minute	Hi: 0-19,500 Lo: 0-6,000
No Load Speed	Hi: 0-1,300 r/min Lo: 0-400 r/min
Maximum Torque	Hard: 42Nm Soft: 27Nm
Net Weight	1.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DHP453RYE 13mm

Cordless Impact Driver Drill

42Nm

Refer to DHP453ZK for specifications.



Includes 2 x BL1815N batteries and 1 x DC18RC Charger.

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DHP485Z 13mm

Cordless Impact Driver Drill

50Nm

Compact design with an overall length of only 192mm.

SPECIFICATIONS

Capacity	
Steel	13mm
Wood	38mm
Masonry	13mm
Impacts per Minute	Hi: 0-28,000 Lo: 0-7,500
No Load Speed	Hi: 0-1,900r/min Lo: 0-500r/min
Maximum Torque	Hard: 50Nm Soft: 25Nm
Net Weight	1.5kg

Li-Ion 5.0 4.0 3.0 1.5

18V

DHP482ZJ 13mm

Cordless Impact Driver Drill

62Nm



SPECIFICATIONS

Capacity	
Steel	13mm
Wood	38mm
Masonry	13mm
Impacts per Minute	Hi: 0-28,500 Lo: 0-9,000
No Load Speed	Hi: 0-1,900 r/min Lo: 0-600 r/min
Maximum Torque	Hard: 62Nm Soft: 36Nm
Net Weight	1.5kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DHP482RFE 13mm

Cordless Impact Driver Drill

62Nm



Refer to DHP482ZJ for specifications.

Includes 2 x BL1830B batteries and 1 x DC18RC Charger

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DHP458ZK 13mm

Cordless Impact Driver Drill

91Nm



Extremely compact tool size.

SPECIFICATIONS

Capacity	
Steel	13mm
Wood	76mm
Masonry	16mm
Impacts per Minute	Hi: 0-30,000 Lo: 0-6,000
No Load Speed	Hi: 0-2,000 r/min Lo: 0-400 r/min
Maximum Torque	Hard: 91Nm Soft: 58Nm
Net Weight	2.0kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V CB440

DHP481ZK 13mm

Cordless Impact Driver Drill

115Nm



SPECIFICATIONS

Capacity	
Steel	13mm
Wood	76mm
Masonry	16mm
Impacts per Minute	Hi: 0-31,500 Lo: 0-8,250
No Load Speed	Hi: 0-2,100 r/min Lo: 0-550 r/min
Maximum Torque	Hard: 115Nm Soft: 60Nm
Net Weight	2.4kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

* Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

CORDLESS TOOLS 18V LXT LITHIUM-ION

DHR202ZK 20mm SDS+ Cordless Rotary Hammer

Lightweight although being a 3-mode rotary hammer.

SPECIFICATIONS

Capacities	
Concrete	20mm
Steel	13mm
Wood	26mm
No Load Speed	0-1,100r/min
Impacts per Minute	0-4,000
Net Weight	3.2kg



* Rotary Hammer sold without bits.

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 18V CB441

DJV182ZK 26mm Cordless Jig Saw

Equipped with high power Brushless DC motor.

BL MOTOR BRUSHLESS

SPECIFICATIONS

Length of Stroke	26mm
Max Cutting Capacities	
In Steel	10mm
In Wood (with optional #B-16L blade)	135mm
In Aluminium	20mm
Strokes per Minute	800 - 3,500
Net Weight	2.6kg



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 18V

DJR187ZK 32mm Cordless Recipro Saw

High efficiency and more work amount with Brushless DC motor.

BL MOTOR BRUSHLESS

SPECIFICATIONS

Length of Stroke	32mm
Max Cutting Capacities with a 300mm blade	
In Pipe	130mm
In Wood	255mm
Strokes per Minute	Hi: 0-3,000 Lo: 0-2,300
Net Weight	3.4kg

XPT
EXTREME PROTECTION TECHNOLOGY

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 18V

* Although Jig & Recipro Saws are portrayed with blades they are sold without blades.

DTD154Z 6.35mm Cordless Impact Driver 175Nm T-mode has an automatic electronic controller that downshifts.

SPECIFICATIONS

Capacities	
Machine Screw	M4-M8
Standard Bolt	M5-M16
High Tensile Bolt	M5-M14
Coarse Thread (screw)	22mm-125mm
No Load Speed (r/min)	0-3,600 / 0-2,100 / 0-1,100
Impacts per Minute (i/min)	0-3,800 / 0-2,600 / 0-1,100
Maximum Fastening Torque	175Nm
Net Weight	1.2kg



* Impact Driver is sold without bits.

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 18V

DJV180ZK 26mm Cordless Jig Saw

High accuracy and efficiency.

Toolless quick blade change.

SPECIFICATIONS

Length of Stroke	26mm
Max Cutting Capacities	
In Steel	10mm
In Wood (with optional #B-16L blade)	135mm
In Aluminium	20mm
Strokes per Minute	0 - 2,600
Net Weight	2.7kg



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 18V CB430

DJR183Z 13mm Cordless Pruning / Recipro Saw

Toolless blade change system allows for faster blade installation and removal.

Compact design at 392 mm.

SPECIFICATIONS

Length of Stroke	13mm
Cutting Capacity	Pipe: 50mm Wood: 50mm
Strokes per Minute	0-3,000
Net Weight	1.6kg



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 18V

* Although Jig & Recipro Saws are portrayed with blades they are sold without blades.

DTD152Z 6.35mm Cordless Impact Driver 165Nm Developed for main applications such as tightening of self-drilling screws or light duty machine screws.

SPECIFICATIONS

Capacities	
Machine Screw	M4-M8
Standard Bolt	M5-M16
High Tensile Bolt	M5-M12
Coarse Thread (screw)	22mm-125mm
No Load Speed	0-2,900r/min
Impacts per Minute	0-3,500
Maximum Fastening Torque	165Nm
Net Weight	1.3kg



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 18V CB448

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 18V

DTD171ZJ 12.7mm Cordless Impact Driver 8-mode operation

SPECIFICATIONS

Machine Screw:	M4 - M8
Standard Bolt:	M5 - M16
High Tensile Bolt:	M5 - M14
Coarse Thread (screw):	22 - 125mm
Max Fastening Torque	180Nm
Impact Per Minute	Max / Hard / Med / Soft / Tmode 0-3,800 / 3,600 / 2,600 / 1,100 / 2,600i/min
No Load Speed	Max / Hard / Med / Soft / Tmode 0-3,600 / 3,200 / 2,100 / 1,100 / 3,600r/min
Net Weight	1.2kg



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 18V

DJV181ZJ 26mm Cordless Jig Saw

3 Orbital Settings Plus Straight Cutting Brushless DC motor. Barrel Handle

SPECIFICATIONS

Length of Stroke	26mm
Max Cutting Capacities	
In Steel	10mm
In Wood (with optional #B-16L blade)	135mm
Strokes per Minute	800 - 3,500
Net Weight	2.6kg



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 18V

DJR186ZK 32mm Cordless Recipro Saw

XPT
EXTREME PROTECTION TECHNOLOGY

Newly designed vertical crank mechanism minimizes blade deflection and reduces vibration to machine.

SPECIFICATIONS

Length of Stroke	32mm
Max Cutting Capacities with a 300mm blade	
In Pipe	130mm
In Wood	255mm
Strokes per Minute	0-2,800
Net Weight	3.5kg



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 18V

DTD153ZJ 170Nm Cordless Impact Driver

Higher speed 3,400r/min, More powerful 170 Nm and More compact 126mm long.

SPECIFICATIONS

Machine Screw:	M4 - M8
Standard Bolt:	M5 - M16
High Tensile Bolt:	M5 - M14
Coarse Thread (screw):	22 - 125mm
Hex Shank:	6.35mm
Max Fastening Torque	170Nm
Impact Per Minute	0 - 3,600i/min
No Load Speed	0 - 3,400r/min
Net Weight	1.3kg



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3 18V

* Impact Driver is sold without bits.

DTW190ZK 12.7mm Cordless Impact Wrench 190Nm

Compact and ergonomic design at only 176 mm long.

SPECIFICATIONS

Capacities	
Standard Bolt	M8-M16
High Tensile Bolt	M8-M12
Impacts per Minute	3,000i/min
No Load Speed	2,300r/min
Maximum Fastening Torque	190Nm
Net Weight	1.4kg



* Impact Wrench is sold without socket and tool catcher.

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3 CB440

CORDLESS TOOLS 18V LXT LITHIUM-ION

DTW251ZK 12.7mm Cordless Impact Wrench 230Nm

High torque to weight ratio.

SPECIFICATIONS

Capacities	
Standard Bolt	M10-M16
High Tensile Bolt	M10-M14
Impacts per Minute	0 - 3,200i/min
No Load Speed	0 - 2,100r/min
Maximum Fastening Torque	230Nm
Net Weight	1.5kg

*Impact Wrench is sold without socket.



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V



DTW285ZK 12.7mm Cordless Impact Wrench 280Nm

280Nm

18V BL Brushless

Cordless 3-Speed.

SPECIFICATIONS

Capacities	
Standard Bolt	M10-M20
High Tensile Bolt	M10-M16
Impacts per Minute	Hard: 0-3,500 / Med: 0-2,600 / Soft: 0-1,800i/min
No Load Speed	Hard: 0-2,800 / Med: 0-2,100 / Soft: 1,600r/min
Net Weight	1.5kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V



DTW450ZK 12.7mm Cordless Impact Wrench 440Nm

Same fastening torque in forward and reverse rotation.

SPECIFICATIONS

Capacity	
Square Drive	12.7mm
Standard Bolt	M12-M22
High Tensile Bolt	M12-M16
Impacts per Minute	2,200i/min
No Load Speed	1,600 r/min
Max. Fastening Torque	440Nm
Net Weight	3.4kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V



DTW1001ZJ 19mm Cordless Impact Wrench 1,050Nm

*Excluding socket.

Maximum tightening torque of 1,050Nm.

SPECIFICATIONS

Capacity	
Square Drive	19mm
Standard Bolt	M14 - M30
High Tensile Bolt	M12 - M24
Impacts per Minute	Hard: 0-2,200 / Medium: 0-2,000 / Soft: 0-1,800i/min
No Load Speed	Hard: 0-1,800 / Medium: 0-1,000 / Soft: 0-900r/min
Max. Fastening Torque	1,050Nm
Net Weight (with BL1850)	3.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V



DTW1002ZJ Cordless Impact Wrench 1000Nm

Extremely high power equivalent to AC model TW1000.

SPECIFICATIONS

Fastening Capacities	
Standard Bolt:	M12 - M30
High Tensile Bolt:	M10 - M24
Square Drive:	12.7mm
Max Fastening Torque	1,000Nm
Impact Per Minute	Hard / Med / Soft 0 - 2,200 / 0 - 2,000 / 0 - 1,800i/min
No Load Speed	Hard / Med / Soft 0 - 1,800 / 0 - 1,000 / 0 - 900r/min
Net Weight	3.3kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V



Model: DTW1002ZJ



DKP180Z 82mm Cordless Planer

Foot on baseplate protects workpiece and blades from scratches and damages.

Reversible mini TCT blades.

Rebate 9mm

SPECIFICATIONS

Planing Width	82mm
Max Planing Depth	2.0mm
No Load Speed	14,000r/min
Net Weight	3.4kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V



DBO180Z Cordless Random Orbit Sander

Excellent performance with high orbital speeds

SPECIFICATIONS

Pad Diameter	123mm
Abrasive Disc Diameter	125mm
Orbits Per Minute	7,000/9,500/11,000
Net Weight	1.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V



DST221Z Cordless Stapler

Machined aluminium magazine ensures smooth staple loading and feeding.

SPECIFICATIONS

Capacities	
Width	10mm
Length	10, 13, 16, 19, 22mm
Magazine Capacity	98pcs
Net Weight	2.4kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V



DPT351Z Cordless Pin Nailer

"Hose-less" enables to perform efficient operation in interior finish work without being disturbed by air hose.

SPECIFICATIONS

Capacities	
Length	18, 25, 30, 35mm
Diameter	0.6mm
Magazine Capacity	130pcs
Net Weight	1.8kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V



DRT50ZJ Cordless Trimmer

Up to 100 Metres of trimming using the 6.0Ah Battery* Trimming 6mm at 4mm deep.*

The soft-start function minimises start-up shock, and makes the tool start smoothly.

SPECIFICATIONS

Collet Capacity	6.35mm
No Load Speed	10,000 - 30,000r/min
Net Weight	1.8kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V



DRT50ZJX2 Cordless Trimmer Set

BL Brushless Motor - provides more power to the motor whilst increasing runtime and durability.

Includes plunge base, tilt base, trimmer base in a systainer case.

SPECIFICATIONS

Collet Capacity	6.35mm
No Load Speed	10,000 - 30,000r/min
Net Weight	1.8kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



* Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

DJN161Z Cordless Nibbler

Nibbler without cord expands more operating field



SPECIFICATIONS

Anti-restart function.

Max. Cutting Capacities	
Mild Steel up to 400 N/mm ²	1.6mm
Stainless Steel up to 600 N/mm ²	1.2mm
Aluminium up to 200 N/mm ²	2.5mm
Minimum Cutting Radius	
Outside Edge	50mm
Inside Edge	45mm
Strokes per Minute	1,900
Net Weight	2.2kg



CB430

18V

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

DUH523Z Cordless Hedge Trimmer

Rubberized soft grip provides comfortable and sure grip.

User-replaceable blade.



SPECIFICATIONS

Blade Length	520mm
Tooth Spacing	26mm
Strokes per min (s/min)	2,700
Net Weight	3.1kg



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DUR181Z Cordless String Trimmer

Well balanced tool design.

5-position pivoting head.



SPECIFICATIONS

Cutting Width	260mm
No Load Speed	7,800r/min
Net Weight	2.9kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DUR187LZ Cordless Grass Trimmer

SPECIFICATIONS

Spindle Size	M8 x 1.25RH
Sound Power Level 84dB(A)	
No Load Speed	3,500 - 6,000r/min
Vibration Level (Front Handle)	2.5m/s ²
Vibration Level (Rear Handle)	2.5m/s ²
Net Weight	3.1kg

Automatic speed control.

BL motor located at trimmer head for improved balance and functionality with no loss of mechanical power.

*Standard with nylon cutting head.



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DUM604Z Cordless Grass Shear

Both trimmer blade and shear blade can be attached.



Grass receiver for reduced grass clean-ups.

SPECIFICATIONS

Cutting Width	160mm
Strokes per min (s/min)	2,500
Net Weight	1.4 - 1.8kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

ADP05 Cordless Adapter for USB

Charges or supplies power to smart phones, tablets etc.

2 USB output ports with caps.

Battery, cable and smart phone not included.



SPECIFICATIONS

USB Port	2 (A type)
Dimensions	102 x 72 x 43mm
Net Weight	0.71kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DML800 Rechargeable Flashlight

Non-slip rubber head strap can be securely attached on hard hat for hands-free operation.



SPECIFICATIONS

Run Time (hrs)	Up to: 30
Illuminance	at 1m from the light source 2,000lx
Luminous ux	100 lm
Net Weight	0.58kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DML802 Rechargeable Flashlight

High luminance 3.2W single LED.



SPECIFICATIONS

Current	0.6A
Continuous Use (hours)	6 (1.5Ah) 13 (3.0Ah)
Net Weight (without battery)	0.65kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

DML801 LED Flashlight

Fluorescent light / Flashlight.

Rotatable and foldable light head enables you to use this product as a compact stationary flashlight.



SPECIFICATIONS

Current	0.6A
Continuous Use (hours)	4 (1.5Ah) 9 (3.0Ah)
Net Weight (without battery)	0.68kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V

DML807 Cordless LED Flashlight

Versatile work light providing ultra-bright illumination and convenience.

Built-in USB port for charging portable electronic devices.



SPECIFICATIONS

Run Time (hrs)	Up to: 43
Main Light (on bar side)	Luminous ux (Full brightness): 710 lm Illuminance (Full brightness): 340 lx
Sub Light (on top side)	Luminous ux: 130 lm Illuminance: 1,900 lx
Net Weight	0.72 kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DML805 LED Worklight

Corded and cordless LED worklight.

Twenty 0.5W white-light LED's deliver bright and even light.



SPECIFICATIONS

Continuous Use (hours)	Hi:2.5 Lo:5.0 (1.5Ah) Hi:5.0 Lo:10 (3.0Ah)
Net Weight (without battery)	2.3kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V



Model: DML805Z

DCF102Z Cordless Swing Fan

3-stage automatic timer with 1, 2, and 4 hour power-off selection.

Equipped with overdischarge protection circuit to protect from overdischarged.



SPECIFICATIONS

Max Air Volume	4.61/min
Overall Dimensions	284mm
Net Weight	1.3-2.0kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V

18Vx2 Lithium-ion

Powered by two 18V Li-ion batteries in series

The compatible batteries are:

with Battery fuel gauge

1.5Ah
BL1815N*



15min
Charge time

3.0Ah
BL1830B



22min
Charge time

5.0Ah
BL1850B



45min
Charge time

6.0Ah
BL1860B



55min
Charge time

*without Battery fuel gauge

***SEE THE RANGE OF 18V + 18V MACHINES IN THE CATALOGUE MARKED WITH**

When different capacity batteries are used together (for example, 1.5Ah BL1815N and 3.0Ah BL1830B, or fully charged BL1830B and 70% charged BL1830B), the machine stops when the battery with less capacity gets empty.



Two 18V Li-ion batteries can be directly installed on the machine to supply energy to the powerful 36V DC motor drive system.



DGA900ZK 230mm Cordless Angle Grinder

Faster cutting with high power.

BL MOTOR
BRUSHLESS

XPT
EXTREME PROTECTION TECHNOLOGY

*Tool does not come with disc



ADT AFT



SPECIFICATIONS

Max. Capacities (dia.)
Depressed Centre Wheel 230mm
No Load Speed 6,000 r/min
Net Weight (With BL1830B) 5.0kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V



Model: DLW140Z

DLW140Z 355mm Cordless Abrasive Cut-Off Saw

Overload indicator with 4 LED bars allows you to see the load and adjust the pressure you are applying for optimal cutting performance.



BL MOTOR
BRUSHLESS



SPECIFICATIONS

Blade Diameter 355mm
Overall Length 530mm
No Load Speed 3,800r/min
Net Weight 15.66kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

new

DUC302Z 300mm Cordless Chain Saw

New adjustment lever for easier tool-less chain adjustment.



Battery capacity warning lamp.

SPECIFICATIONS

Chain Speed 8.3m/s
Cutting Length 300mm
Chain Pitch 3/8" or 1/4"
Net Weight 4.1kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DUC400Z 400mm Cordless Chain Saw

BL MOTOR
BRUSHLESS



XPT
EXTREME PROTECTION TECHNOLOGY

SPECIFICATIONS

Chain Speed 20m/s
Cutting Length 400mm
Chain Blade Pitch 3/8"
Gauge 1.3mm / 1.1mm
Net Weight 4.9kg (BL1815Nx2)

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DHS710Z 190mm Cordless Circular Saw

With TCT saw blade.



SPECIFICATIONS

Blade Diameter 190mm
Max. Cutting Capacity
At 0° 68.5mm
At 45° 49mm
No Load Speed 4,800r/min
Net Weight 4.1kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

*Standard with Blade Part No. B-02939

DSP600ZJ 165mm Cordless Plunge Cut Saw

Up to 40% faster cutting than corded model.

BL MOTOR
BRUSHLESS



ADT

SPECIFICATIONS

Blade Diameter 165mm
Max. Cutting Capacity
At 90° 56mm
At 45° 40mm
No Load Speed 2,500-6,300r/min
Net Weight 4.4kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DHR280ZJ 28mm SDS+ **new** Cordless Combination Hammer

Satisfy both High power & Low vibration.

AVT
Anti Vibration Technology



SPECIFICATIONS

Capacities
Concrete 26mm
Steel 13mm
Wood 32mm
No Load Speed 0-980r/min
Blows per min 0-5,000b/min
Net Weight 3.9kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DHR263ZK 26mm SDS+ Cordless Rotary Hammer

3 operation modes



3.0 Joules

SPECIFICATIONS

Capacities
Concrete 26mm
Steel 13mm
Wood 32mm
No Load Speed 0-1,200r/min
Impacts per min 0-4,800i/min
Net Weight 4.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

* Unless otherwise indicated, although 18V + 18V Li-ion tools are portrayed with batteries, they are sold as tool only without batteries and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

Drilling work amount

Work volume on a single full battery charge

About **25** holes

- w/ T.C.T. bit Ø18mm
- Depth: 140mm
- Concrete: 40 N / mm²
- Battery: BL1850Bx2

Demolition work

with bull point

Impact Energy

[EPTA-Procedure 05/2009]

8.0 J

Makita HR4013C 8.0J

18Vx2 Rotary Hammer DHR400ZK 1-9/16" (40 mm)

- Variable Speed
- Brake
- Reversing
- SDS-MAX Shank
- Torque Limiter
- Constant Speed
- Soft Start
- Dust Collection
- Built-in Job Light
- Carrying Case

Battery Capacities	Two 18V Li-Ion
Capacities:	Concrete (TCT): 1-9/16" (40 mm)
	Concrete (Core Bit): 4-1/8" (105 mm)
Impact Energy	11.4 J (8.4 ft. lbs)
No Load Speed	250 - 500 RPM
Blows Per Minute	1,450 - 2,900 BPM
Overall Length	18-5/8" (473 mm)

DHR400ZK Standard Equipment: Tool Only. Batteries and Charger Sold Separately. Straight Side Handle (123138-5), D-Style Side Handle (196792-8), Cleaning Cloth (443122-7), Bit Grease (194683-7), Depth Gauge (331955-1), Plastic Carrying Case (821746-3)

Cordless Rotary Hammer

DHR400ZK SDS-Max **new**



BRUSHLESS
X2
18V + 18V → 36V

Extra Comfort with unrivaled low level of vibration

AVT & SOFT
ANTI VIBRATION TECHNOLOGY **NO LOAD**

AWS
BL
MOTOR
XPT
EXTREME PROTECTION TECHNOLOGY

CORDLESS TOOLS 36V LXT LITHIUM-ION

18V LITHIUM-ION

18V + 18V → 36V



Powered by two 18V Li-Ion batteries

DHR400ZK 26mm SDS-Max **new** Cordless Rotary Hammer

Extra Comfort with unrivaled low level of vibration.



SPECIFICATIONS * Rotary Hammer sold without bits.

Capacities	
Concrete (TCT)	40mm
Concrete (Core bit)	105mm
Impact Energy	11.4J
No Load Speed	250-500r/min
Blows per min	1,450-2,900b/min
Net Weight	4.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DUB361Z Cordless Blower

Cordless blower powered by two 18V Li-Ion batteries in series.



SPECIFICATIONS

Air Volume	Hi: 4.4m³/min Lo: 2.6m³/min
Air Speed	Hi: 93m/s Lo: 57m/s
Sound Power Level	94.7dB(A)
No Load Speed	Hi: 17,000r/min Lo: 10,000r/min
Net Weight	2.6kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DUB362Z Cordless Blower

High air volume and air speed delivered by brushless motor and two 18V Li-Ion batteries in series.



High Volume Garden Blower

SPECIFICATIONS

Air Volume	6.9-13.4m³/min
Air Speed	27-54m/s
Sound Power Level	96dB(A)
No Load Speed	11,400-21,500 r/min
Vibration Level	0.3m/s²
Net Weight	3.5kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DLS714Z Cordless Mitre Saw



With TCT saw blade.

High power delivered by 18Vx2 enables to cut as fast as AC mitre saw.

SPECIFICATIONS

Blade Diameter	190mm
Cutting Capacity At 0°	52mm x 300mm
At 45° left	40mm x 300mm
At 5° right	40mm x 300mm
No Load Speed	5,700 r/min
Net Weight	12.6kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



*Standard with Blade Part No. B-04298

DUH651Z Cordless Hedge Trimmer

Two 18V LXT Li-Ion batteries deliver the power and performance for corded demands without leaving the 18V LXT platform. High maneuverability and environment-friendly. Rotatable rear handle.



SPECIFICATIONS

Blade Length	650mm
Strokes per min (s/min)	2,000-3,600
Net Weight	4.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



DUR364LZ Cordless Grass Trimmer

High power and more work amount.



Powered by two 18V Li-Ion batteries in series.

SPECIFICATIONS

Spindle Size	M8 x 1.25RH
Sound Power Level	92dB(A)
No Load Speed	5,000 / 6,500r/min
Vibration Level (Front Handle)	1.7m/s²
Vibration Level (Rear Handle)	1.2m/s²
Net Weight	4.0kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



*Standard with nylon cutting head.

DUR365UZ Cordless Grass Trimmer



SPECIFICATIONS

Spindle Size	M10 x 1.25LH
Sound Power Level	86dB(A)
No Load Speed	3,500 / 5,500 6,500r/min
Vibration Level (Left Handle)	1.1m/s²
Vibration Level (Right Handle)	0.9m/s²
Net Weight	4.7kg

Direct drive system featuring Outer rotor brushless motor.

Multifunctional control panel for operating main/variable speed control/reversing switches.

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



*Standard with nylon cutting head.
*Blade not included.

DLM380DZ Cordless Lawn Mower

High maneuverability and environment-friendly.

SPECIFICATIONS

Cutting Width	380mm
Cutting Height	28-75mm
No Load Speed	3,700r/min
Box Capacity	40L
Net Weight	14.5kg



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



*Standard with Blade Part No. 196863-1

DLM460/1Z **Coming Soon!** Cordless Lawn Mower

The 460mm heavy duty steel deck & 4 swing back blades have been designed to withstand harsh conditions.

SPECIFICATIONS **new**

Cutting Width	460mm
Cutting Height	16 - 75mm
No Load Speed	3,300r/min
Box Capacity	60L
Net Weight	27.2kg



Li-Ion Ah 6.0 5.0 4.0 3.0 1.5



*Standard with Blade Part No. 197761-2

* Unless otherwise indicated, although 18V + 18V Li-Ion tools are portrayed with batteries, they are sold as tool only without batteries and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

LIMITED INTERNATIONAL RANGE

International 18V Range - Stocks Are Limited - Available on Request.

DDF484ZJ Cordless Driver Drill 60Nm

Variable 2-speed for a wide range of drilling and fastening applications.

XPT
EXTREME PROTECTION TECHNOLOGY

SPECIFICATIONS

Capacity	
Steel:	13mm
Wood:	38mm
Chuck capacity	1.5 - 13mm
No Load Speed	High / Low: 0 - 2,000 / 0 - 500r/min
Max Fastening Torque	Hard / Soft: 54 / 30Nm
Max Lock Torque	60Nm
Net Weight	1.5kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DDF481ZJ Cordless Driver Drill 125Nm

Features the highest torque in the industry.

BL MOTOR
BRUSHLESS

SPECIFICATIONS

Capacity	
Steel:	13mm
Wood:	76mm
Chuck capacity	1.5 - 13mm
No Load Speed	High / Low: 0 - 2,100 / 0 - 550r/min
Max Fastening Torque	Hard / Soft: 115 / 60Nm
Max Lock Torque	125Nm
Net Weight	2.4kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DHP483ZJ Cordless Impact Driver Drill 40Nm

Ultra-compact and ergonomic design at only 176 mm long.

BL MOTOR
BRUSHLESS

SPECIFICATIONS

Capacity	
Steel:	13mm
Wood:	36mm
Masonry:	13mm
Max Fastening Torque	Hard / Soft: 40 / 23Nm
Impacts Per Minute	High / Low: 0 - 25,500 / 0 - 7,500i/min
No Load Speed	High / Low: 0 - 1,700 / 0 - 500r/min
Net Weight	1.3kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V

DHP484ZJ Cordless Impact Driver Drill 60Nm

0-30,000i/min for fast hammer drilling in masonry materials.

BL MOTOR
BRUSHLESS

SPECIFICATIONS

Capacity	
Steel:	13mm
Wood:	38mm
Masonry:	13mm
Max Fastening Torque	Hard / Soft: 54 / 30Nm
Max Lock Torque	60Nm
Impacts Per Minute	High / Low: 0 - 30,000 / 0 - 7,500i/min
No Load Speed	High / Low: 0 - 2,000 / 0 - 500r/min
Net Weight	1.6kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V

DTD155ZJ Cordless Impact Driver 135Nm

2-speed power selection switch provides the user with precise fastening control for a wide range of applications.

XPT
EXTREME PROTECTION TECHNOLOGY

SPECIFICATIONS

Machine Screw:	M4 - M8
Standard Bolt:	M5 - M14
High Tensile Bolt:	M5 - M12
Coarse Thread (screw):	22 - 90mm
Hex Shank:	6.35mm
Max Fastening Torque	135Nm
Impact Per Minute	Hi / Lo: 0 - 3,000 / 0 - 1,300i/min
No Load Speed	Hi / Lo: 0 - 3,900 / 0 - 1,600r/min
Net Weight	1.2kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DTL063ZJ Cordless Impact Wrench 60Nm

Compact angle head for easy access to bolts in tight places.

Conveniently located reverse switch.

SPECIFICATIONS

Fastening Capacities	
Standard Bolt:	M4 - M12
High Tensile Bolt:	M4 - M8
Square Drive:	9.5mm
Max Fastening Torque	60Nm
Impact Per Minute	0 - 3,000i/min
No Load Speed	0 - 2,000r/min
Net Weight	1.5kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V

DTS141ZJ Cordless Oil-Pulse Driver 40Nm

Incredibly low noise operation thanks to the impact mechanism using oil unit instead of anvil and hammer.

XPT
EXTREME PROTECTION TECHNOLOGY

SPECIFICATIONS

Machine Screw:	M4 - M8
Standard Bolt:	M5 - M8
High Tensile Bolt:	M5 - M6
Coarse Thread (screw):	22 - 125mm
Impact Per Minute	Hard/Medium/Soft 0 - 2,700 / 0 - 2,200 / 0 - 1,400i/min
No Load Speed	Hard/Medium/Soft 0 - 3,200 / 0 - 2,000 / 0 - 1,200r/min
Net Weight	1.2kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DTL061ZJ Cordless Angle Impact Driver 60Nm

Compact angled head for easy access in confined spaces.

SPECIFICATIONS

Machine Screw:	M4 - M8
Standard Bolt:	M5 - M12
High Tensile Bolt:	M4 - M8
Coarse Thread (screw):	22 - 75mm
Max Fastening Torque	60Nm
Impact Per Minute	0 - 3,000i/min
No Load Speed	0 - 2,000r/min
Net Weight	1.5kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

Model: DTL061ZJ



DFS452ZJ Cordless Screwdriver

Push Drive Technology - in lock-on mode the motor starts only when the fastener is engaged for a quieter work environment and to save battery power.

XPT
EXTREME PROTECTION TECHNOLOGY

SPECIFICATIONS

Capacity	6mm
Self-Drilling Screw	5mm
Drywall Screw	6.35mm
No Load Speed	0 - 4,000r/min
Net Weight	1.5kg

Li-Ion 6.0 5.0 4.0 3.0 1.5

18V

DFS251ZJ Cordless Screwdriver

Ideal for fastening self drilling screw. Features new and innovative Push Drive Technology.

SPECIFICATIONS

Capacity	
Self-Drilling Screw	6mm
Drywall Screw	5mm
Driving Shank	6.35mm
No Load Speed	0 - 2,500r/min
Net Weight	1.5kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

Model: DFS452ZJ



LIMITED INTERNATIONAL RANGE

International 12V max Range - Stocks Are Limited - Available on Request.

DCJ205Z

Cordless Heated Jacket

Up to 28 hours of heat with BL1850(B) battery.
3 core heat zones (left chest, right chest, back) for optimum heat distribution.
3 heat settings (high / medium / low) for precise heating control.



SPECIFICATIONS

Run Time (hrs)	With BL1830(B) Low / Medium / High: 17 / 9.5 / 5
Heat Zones	Total / Chest / Back: 3 / 2 / 1
Heat Settings	High / Medium / Low
Size	S / M / L / XL / 2XL / 3XL
Pockets	5
Net weight	1.5 kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

TD111DZJ

Cordless Impact Driver

CXT - Compact Extreme Technology.
More work amount with Brushless Motor.

SPECIFICATIONS

Capacities	
Machine Screw	M4-M8
Standard Bolt	M5-M14
High Strength Bolt	M5-M12
Coarse Thread	22 - 90mm
Hex Shank:	6.35mm
No Load Speed	Hi: 0 - 3,000r/min Lo: 0 - 1,300r/min
Max. Fastening Torque	135Nm
Net Weight	0.97kg



Li-Ion Ah 4.0 1.5

12Vmax

HS301DZJ 85mm

12V max CXT Li-Ion Cordless 85mm Circular Saw.
Powerful motor delivers fast cutting of plywood, MDF, pegboard, particleboard, melamine, drywall and more.



SPECIFICATIONS

Blade Diameter	85mm
Max Cutting Capacity 90°:	25.5mm
45°:	16.5mm
No Load Speed	1,500r/min
Net Weight	1.6kg

Li-Ion Ah 4.0 1.5

12Vmax

SD100DZJ

Cordless Drywall Saw

12V max CXT Li-Ion Cordless Drywall Saw.

Ideal for cutting holes in drywalls when setting ceiling lights, air vents etc.



SPECIFICATIONS

Strokes Per Minute	0 - 6,000s/min
Length of Stroke	6mm
Capacity	Drywall: 30mm Wood: 15mm
Net Weight	1.5kg

Li-Ion Ah 4.0 1.5

12Vmax

HP331DZJ 10mm

Cordless Impact Driver Drill

CXT - Compact Extreme Technology.
Increased motor power with slide LXT battery.

SPECIFICATIONS

Capacities	
Steel	10mm
Wood	21mm
No Load Speed	
Hi	0 - 1,700r/min
Lo	0 - 450r/min
Max. Fastening Torque	
Hard	30N.m
Soft	14N.m
Net Weight	1.1kg



Li-Ion Ah 4.0 1.5

CXT

12Vmax

HR166DZJ 16mm

Cordless Rotary Hammer

12V max CXT BL Brushless Cordless 16mm Rotary Hammer.

SPECIFICATIONS

Impact Energy 1.1 J	
Capacity	Concrete: 16mm
	Steel: 10mm
	Wood: 13mm
Impacts Per Minute	0 - 5,000i/min
No Load Speed	0 - 850r/min
Net Weight	1.6kg



Li-Ion Ah 4.0 1.5

CXT

12Vmax

JV101DZJ

Cordless Jig Saw

12V max CXT Li-Ion Cordless Top Handle Jig Saw.
3 orbital settings plus straight cutting for use in a wide range of materials.

SPECIFICATIONS

Max Cutting Capacity at 90°	Wood: 65mm
	Aluminium: 4mm
	Mild Steel: 2mm
Length of Stroke	18mm
Strokes Per Minute	0-2,900
Net Weight	1.7kg



Li-Ion Ah 4.0 1.5

CXT

12Vmax

ST113DZJ

Cordless Stapler

12V max CXT Li-Ion Cordless 10 mm RT Stapler

Operable in either way of "contact actuation" or "single sequential actuation".

SPECIFICATIONS

Staple	
Width:	10mm
Length:	7, 10mm
Gauge:	0.5 x 0.7mm
Magazine Capacity	150 (max 160)
Net Weight	1.3kg



Li-Ion Ah 4.0 1.5

CXT

12Vmax

HP332DZJ 10mm

10mm Cordless Impact Driver Drill

CXT - Compact Extreme Technology.
More work amount with Brushless Motor.

SPECIFICATIONS

Capacities	
Steel	10mm
Wood	28mm
No Load Speed	
Hi	0 - 1,500r/min
Lo	0 - 450r/min
Max. Fastening Torque	
Hard	35N.m
Soft	21N.m
Net Weight	1.1kg



Li-Ion Ah 4.0 1.5

CXT

12Vmax

TM30DZK

Cordless Multi Tool

12V max CXT Li-Ion Cordless Multi Tool.
Oscillation angle engineered for faster, more aggressive cutting & sanding.

SPECIFICATIONS

Oscillations Per Minute	6,000 - 20,000o/min
Oscillation Angle Left / Right / Total:	1.6° / 1.6° / 3.2°
Vibration Level	Sanding: 2.5m/s² or less
	Plunge Saw Blade: 10.5m/s²
	Segmental Saw Blade: 5.5m/s²
	Scraping: 9.0m/s²
Net Weight	1.1kg



Li-Ion Ah 4.0 1.5

CXT

12Vmax

JR105DZJ

Cordless Recipro Saw

12V max CXT Li-Ion Cordless Recipro Saw.
Exclusive dual-position on/off switch design allows for either paddle or trigger switch operation.

SPECIFICATIONS

Length of Stroke	13mm
Strokes Per Minute	0 - 3,300s/min
Capacity	Pipe: 50mm
	Wood: 50mm
Net Weight	1.3kg



Li-Ion Ah 4.0 1.5

CXT

12Vmax

PT354DZJ

Cordless Pin Nailer

12V max CXT Li-Ion Cordless Pin Nailer.

Anti-dry fire mechanism engineered to prevent driving blanks and damage to work surface.

SPECIFICATIONS

Capacity	
Length	15, 18, 25, 30, 35mm
Diameter	0.6mm
Magazine Capacity	120
Net Weight	2.0kg



Li-Ion Ah 4.0 1.5

CXT

12Vmax

* Unless otherwise indicated, although 12V max Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

LIMITED INTERNATIONAL RANGE

International 18V Range - Stocks Are Limited - Available on Request.

DHR242ZJ

Cordless Combination Hammer 24mm

3-mode operation for "Rotation Only", "Hammering with Rotation" or "Hammering Only" for multiple applications.

XPT
EXTREME PROTECTION TECHNOLOGY

SPECIFICATIONS

Capacity	
Concrete:	24mm
Steel:	13mm
Wood:	27mm
Impact Energy	2 Joules
Impacts Per Minute	0 - 4,700i/min
No Load Speed	0 - 950r/min
Net Weight	3.0kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V

BL
MOTOR
BRUSHLESS

DHR165ZK

Cordless Rotary Hammer 16mm

Versatile 2 mode operation - Rotation with Hammering and Rotation only.

XPT
EXTREME PROTECTION TECHNOLOGY

SPECIFICATIONS

Capacity	
Concrete:	16mm
Steel:	13mm
Wood:	24mm
Impact Energy	1.3 Joules
Impacts Per Minute	0 - 5,300i/min
No Load Speed	0 - 1,600r/min
Net Weight	2.2kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DPB180ZK

Cordless Portable Band Saw

6-setting variable speed control dial enables user to match the speed to the application.

Built-in L.E.D. protection circuit with over-torque control protects motor.

SPECIFICATIONS

Capacity	
Round:	120mm
Rectangular	
Workpiece	120 x
Without Stand:	120mm
Blade Speed	1.4 - 2.7m/s
Net Weight	6.2kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5 1.3

18V

DJS161ZJ

Cordless Straight Shear 1.6mm

Straight design provides more control and high maneuverability for easy cutting operation.

High cutting capacity: cuts up to 1.6 mm thick mild steel sheet.

SPECIFICATIONS

Capacity	
Steel up to 400 N/mm ² :	1.6mm
Steel up to 600 N/mm ² :	1.2mm
Aluminium up to 200 N/mm ² :	2.5mm
Strokes Per Minute	4,300s/min
Net Weight	2.0kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DGD801ZK

Cordless Die Grinder 6mm

Now free from cord for easy job site portability.

Vent slots designed to direct exhaust air away from operator.

Short-nose type.

SPECIFICATIONS

Capacity	
Collet: 6mm	
Wheel Diameter	38mm
No Load Speed	25,000r/min
Net Weight	1.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DJV181ZJ

Cordless Jig Saw

Barrel handle type cordless jig saw with powerful Brushless DC motor.

Electric brake for maximum productivity and increased operator safety.

SPECIFICATIONS

Capacity	
Wood:	135mm
Steel:	10mm
Length of Stroke	26mm
Strokes Per Minute	800 - 3,500s/min
Net weight	2.2kg

Li-Ion 6.0 5.0 4.0 3.0 1.5

18V

DJR360ZK

Cordless Recipro Saw

Powered by two 18V Li-ion batteries in series and featuring high output Brushless DC motor, enabling outstanding performance in cutting work.

BL
MOTOR
BRUSHLESS

SPECIFICATIONS

Capacity	
Pipe: 130mm	
Wood: 255mm	
Length of stroke	32mm
Strokes per minute	Hi: 0-3,000s/min Lo: 0-2,300s/min
Net Weight	4.0kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DVR450Z

Cordless Concrete Vibrator

1,200mm flexible shaft is pretty effective with leveling and removal of air-bubble in deep founds.

SPECIFICATIONS

Diameter Of Vibrator	25mm
Length Of Flexible part	1,200mm
Vibrations Per Minute	13,000v/min
Net Weight	3.5kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DSD180ZJ

Cordless Drywall Saw

Ideal for cutting holes in drywalls when setting ceiling lights, air vents etc.

More suitable for straight cuts compared with general cut-out tools.

SPECIFICATIONS

Capacity	
Drywall:	30mm
Wood:	15mm
Length Of Stroke	6mm
Strokes Per Minute	0 - 6,000s/min
Net Weight	1.7kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DST112ZJ

Cordless Stapler

Weighs only 1.6kg for reduced operator fatigue.

Contact actuation mode drives staples repetitively for quick operation.

SPECIFICATIONS

Staple	
Width:	10mm
Length:	7, 10mm
Gauge:	0.5 x 0.7mm
Magazine Capacity	150 (Max 160)
Net weight	1.6kg

Li-Ion 6.0 5.0 4.0 3.0 1.5

18V

XPT
EXTREME PROTECTION TECHNOLOGY

DPT353ZJ

Cordless Pin Nailer

Low recoil mechanism reduces a recoil when shooting.

Easy-to-see slim nose tip allows quick and easy access to a desired fastening point.

SPECIFICATIONS

Capacity	
Length: 15, 18, 25, 30, 35mm	
Diameter:	0.6mm
Magazine Capacity	130
Net Weight	2.2kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5

18V

DVC862LZ

Cordless Vacuum Cleaner

Features Extreme Protection Technology (XPT) which is engineered to provide increased dust and water resistance in harsh job site conditions.

SPECIFICATIONS

Capacity	
Dust / Water: 8 / 6 L	
Continuous Use (min.)	With BL1850B x 2: 40
Max Air Flow	1.8 m ³ /min
Max Sealed Suction	10.0 kPa
Suction Power	80 W
Net Weight	7.2 kg

Li-Ion Ah 6.0 5.0 4.0 3.0 1.5


18V

BL
MOTOR
BRUSHLESS

XPT
EXTREME PROTECTION TECHNOLOGY

Forced air cooling system DC10SB only

- Stand-by time until the charge starts can be greatly shortened by using charger DC10SB equipped with a built-in cooling fan.
- Effectively cools down every battery cell with the forced air cooling system and the heat sinks.

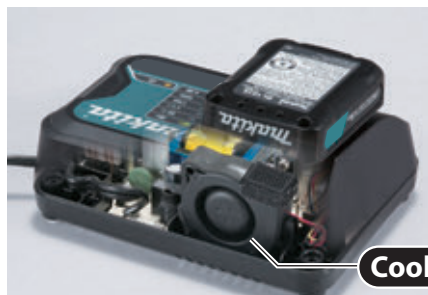


Cooling fan



Charging status indicator

shows the charging status of a battery being charged in 2 stages: less than 80% and 80% or more.



Multi-Contact Slide-type Terminal

- Ensures stable contact with tool even under extreme vibration.
- Allows tools to be equipped with an ergonomic handle design.



Wall mountable for charging

can be mounted on the wall for charging, allowing the user to obtain maximum working space on workbench.



Battery fuel gauge

BL1041B only

The power remaining in the battery can be indicated in 4 stages simply by pushing a button.



(4 stage LED)

Li-ion Battery & Charger Time Reference, Compatibility Chart

DC10SB (198576-0)	1.5Ah	4.0Ah
	BL1016	BL1041B
	22 min.	60 min.

CC301DZJ 85mm Cordless Cutter

12V max CXT Li-Ion Cordless 85mm Cutter, Wet Type.

Powerful motor delivers fast and powerful cutting.

SPECIFICATIONS

Blade Diameter	85mm
Max Cutting Capacity	90°: 25.5mm
	45°: 16.5mm
No Load Speed	1,600r/min
Tank Capacity	Water : 0.5L
Net Weight	1.8kg



Li-Ion Ah 4.0 1.5 CXT 12V^{max}

DF331DZ 10mm Cordless Driver Drill

CXT - Compact Extreme Technology. Increased motor power with slide LXT battery.

SPECIFICATIONS

Capacities	
Steel	10mm
Wood	21mm
No Load Speed	
Hi	0 - 1,700 r/min
Lo	0 - 450 r/min
Max. Fastening Torque	
Hard	30N.m
Soft	14N.m
Net Weight	1.1kg



Li-Ion Ah 4.0 1.5 CXT 12V^{max}

DF332DSYE 10mm Cordless Driver Drill Kit

CXT - Compact Extreme Technology. More work amount with Brushless Motor.

SPECIFICATIONS

Capacities	
Steel	10mm
Wood	28mm
No Load Speed	
Hi	0 - 1,500 r/min
Lo	0 - 450 r/min
Max. Fastening Torque	
Hard	35N.m
Soft	21N.m
Net Weight	1.0kg



Supplied with:
2 x 1.5Ah 12V max Li-Ion
Slide Battery and Charger.

Li-Ion Ah 4.0 1.5 CXT 12V^{max}

TD110DZ Cordless Impact Driver

CXT - Compact Extreme Technology. Best possible ergonomic handle.

SPECIFICATIONS

Capacities	
Machine Screw	M4-M8
Standard Bolt	M5-M12
High Strength Bolt	M5-M10
Coarse Thread	22 - 90mm
No Load Speed	0 - 2,600r/min
Impact per Min	0 - 3,500i/min
Max. Fastening Torque	110Nm
Net Weight	1.0kg



Li-Ion Ah 4.0 1.5 CXT 12V^{max}

LIMITED INTERNATIONAL RANGE

International 12V max Range - Stocks Are Limited - Available on Request.

UH201DZ Cordless Hedge Trimmer

12V max CXT Li-Ion Cordless 20cm Hedge Trimmer.

Both trimmer blade and shear blade can be attached.



SPECIFICATIONS

Blade length 200mm
Strokes Per Minute 1,250s/min
Net Weight 1.4 kg

Li-Ion Ah 4.0 1.5

ML104 Cordless LED Flashlight

12V max CXT Li-Ion 21 LED Flashlight, 710 Lumens.

Three LED lighting modes: 360° lantern, 90° lantern or flashlight.

XPT
EXTREME PROTECTION TECHNOLOGY

SPECIFICATIONS

Run Time (hrs) Up to: 22
Main light (on bar side) Luminous ux (Full brightness): 710 lm
Illuminance (Full brightness): 340 lx
Sub light (on top side) Luminous ux: 130 lm
Illuminance: 1,900 lx
Net weight 0.64 kg



Li-Ion Ah 4.0 1.5

UM600DZ Cordless Grass Shear

12V max CXT Li-Ion Cordless 16cm Grass Shear.

Both trimmer blade and shear blade can be attached.



SPECIFICATIONS

Cutting width 160mm
Strokes Per Minute 1,250s/min
Net Weight 1.4 kg

Li-Ion Ah 4.0 1.5

ML105 Cordless LED Flashlight

12V max CXT Li-Ion LED Flashlight, 160 Lumens.

12 position pivoting flashlight head with positive stops from 60° - 110°.

Up to 11 hours of illumination with BL1041B.

SPECIFICATIONS

Run Time (hrs) Up to: 11
Luminous ux 160 lm
Illuminance at 1m from the light source 4,000 lx
Net weight 0.57 kg



Li-Ion Ah 4.0 1.5

MR052 Cordless Job Site Radio

12V max CXT Li-Ion Cordless Radio.

Up to 30 hours of continuous operation from a single charge (with BL1041B).



SPECIFICATIONS

Frequency Band FM / AM: 87.5 - 108 MHz / 522 - 1,710 kHz
Continuous use (hrs) With BL1041B: 30
With BL1016: 11
Net weight 0.56 kg

Li-Ion Ah 4.0 1.5

ML103 Cordless LED Flashlight

CXT Li-Ion Cordless LED Flashlight, 100 Lumens.

Compact size fits your hand perfectly. Ergonomic design easy to grip either from the top or the side.



SPECIFICATIONS

Run Time (hrs) Up to: 28
Net weight 270g

Li-Ion Ah 4.0 1.5

Model: JV101DZJ



Model: HP331DZJ



Model: TD111DZJ



▣ ***CORDED TOOLS***



INDUSTRIAL POWER TOOLS

ANGLE GRINDERS

GA4530 115mm

Ergonomically best possible grip for easy handling.



SPECIFICATIONS

Wheel Diameter	115mm
Hole Diameter	22.23mm
No Load Speed	11,000 r/min
Net Weight	1.8kg
Power Supply Cord	2.5m



720W

GA4534 115mm

Easy to operate paddle switch by the hand gripping motor housing.



SPECIFICATIONS

Wheel Diameter	115mm
No Load Speed	11,000 r/min
Net Weight	1.9kg
Power Supply Cord	2.5m



720W

9557HNG 115mm

High performance motor.



SPECIFICATIONS

Wheel Diameter	115mm
No Load Speed	11,000 r/min
Net Weight	2.0kg
Power Supply Cord	2.5m



840W

GA4540 115mm

"Super Joint System II" developed for effective vibration absorption.



SPECIFICATIONS

Wheel Diameter	115mm
No Load Speed	11,000 r/min
Net Weight	2.4kg
Power Supply Cord	2.5m



1,100W

9558HP 125mm

Non-locking paddle switch grinders are for use in workplaces where safety is specified, especially in the mining & petrochemical industries.



SPECIFICATIONS

Wheel Diameter	125mm
No Load Speed	11,000 r/min
Net Weight	2.1kg
Power Supply Cord	2.5m



840W

GA5010 125mm

Easy to grip motor housing.



Switch with easy-to-operate single finger trigger..

SPECIFICATIONS

Wheel Diameter	125mm
No Load Speed	12,000 r/min
Net Weight	2.6kg
Power Supply Cord	2.5m



1,050W

GA5040 125mm

"Super Joint System II" developed for effective vibration absorption.



SPECIFICATIONS

Wheel Diameter	125mm
No Load Speed	11,000 r/min
Net Weight	2.5kg
Power Supply Cord	2.5m



1,100W

GA5040C 125mm

Anti-restart function.

Re-designed durable gear housing.



SPECIFICATIONS

Wheel Diameter	125mm
No Load Speed	12,800 - 11,000 r/min
Net Weight	2.5kg
Power Supply Cord	2.5m



1,400W

GA7020 180mm

Outstanding durability.



Gear housing can be positioned at every 90 degrees.

SPECIFICATIONS

Wheel Diameter	180mm
No Load Speed	8,500 r/min
Net Weight	5.5kg
Power Supply Cord	2.5m



2,200W

GA7010C 180mm

Extra Slim design.



Compact & lightweight with high power to weight ratio for greater efficiency.



SPECIFICATIONS

Wheel Diameter	180mm
Wire Cup Brush	110mm max
No Load Speed	8,400 r/min
Net Weight	4.3kg
Power Supply Cord	2.5m



1,800W

GA9010C 230mm

Extra Slim design.



High power to weight ratio for greater efficiency.



SPECIFICATIONS

Wheel Diameter	230mm
Wire Cup Brush	110mm max
No Load Speed	6,000 r/min
Net Weight	3.4kg
Power Supply Cord	2.5m



1,800W

GA9050 230mm

Extra Slim design with "Deadman's" switch.



Most compact in its class

SPECIFICATIONS

Wheel Diameter	230mm
Wire Cup Brush	110mm max
No Load Speed	6,600 r/min
Net Weight	4.7kg
Power Supply Cord	2.5m



2,000W

INDUSTRIAL POWER TOOLS

ANGLE GRINDERS

GA9060 230mm

Developed for Heavy Duty applications.



SPECIFICATIONS

Wheel Diameter	230mm
No Load Speed	6,600 r/min
Net Weight	5.5kg
Power Supply Cord	2.5m



CB218

2,200W

GA9020 230mm

Outstanding durability.



SPECIFICATIONS

Wheel Diameter	230mm
Wire Cup Brush	110mm max
No Load Speed	6,600 r/min
Net Weight	5.8kg
Power Supply Cord	2.5m



CB204

2,200W

GA9020K 230mm

Gear housing can be positioned at every 90°, as with GA9020.



With Carry Case.

SPECIFICATIONS

Wheel Diameter	230mm
Wire Cup Brush	110mm max
No Load Speed	6,600 r/min
Net Weight	5.8kg
Power Supply Cord	2.5m



CB204

2,200W

GA9040SK01 230mm

Anti-Vibrating Grip.



Rotatable rear handle.

SPECIFICATIONS

Wheel Diameter	230mm
Wire Cup Brush	110mm max
No Load Speed	6,600 r/min
Net Weight	6.6kg
Power Supply Cord	2.5m



CB204

2,600W

BENCH GRINDERS

GB602

with WA60 & GC120 grinding wheels.



SPECIFICATIONS

Wheel Diameter	150mm
Hole Diameter	12.7mm
H.P.	1/3
No Load Speed	2,850 r/min
Net Weight	9.2kg



250W

Model: GB602



BAND SAW

LB1200F 305mm

One touch lever for easy blade replacement.



SPECIFICATIONS

Capacity	
Throat	305mm
Thickness of Cut	165mm
Blade Speed	
Hi	800 m/min
Lo	400 m/min
Net Weight	81.2kg
Power Supply Cord	2.5m



900W

STR GRINDER

GS5000 Straight Grinder 125mm

"Deadman" switch.



Lightweight with large soft grip.

SPECIFICATIONS

Wheel Diameter	125mm
Hole Diameter	12.7, 20mm
No Load Speed	5,600 r/min
Net Weight	5.0kg
Power Supply Cord	2.5m

CB204



750W

BISCUIT JOINER

PJ7000

New compact and lightweight design.



SPECIFICATIONS

Blade Diameter	100mm
No Load Speed	11,000 r/min
Net Weight	2.5kg
Power Supply Cord	2.5m



CB459

701W

*Standard with Blade Part No. B-20644

BELT SANDERS

9032 9mm

Optional 6 and 13mm sanding arms available for a wide range of sanding and filing jobs.



SPECIFICATIONS

Belt Size	9mm x 533mm
Belt Speed	300 - 1,700 m/min
Max. Sanding Depth	110mm
Net Weight	1.6kg
Power Supply Cord	2.5m



CB410

500W

9031 30mm

Belt speed can be adjusted for sanding a wide variety of materials.

Ideal for glass.



SPECIFICATIONS

Belt Size	30mm x 533mm
Belt Speed	200 - 1,000 m/min
Net Weight	2.1kg
Power Supply Cord	2.5m



CB410

550W

* Although Angle Grinders are portrayed with a grinding disc, 180mm & 230mm grinders are sold without grinding discs.

INDUSTRIAL POWER TOOLS

BELT SANDERS

9401 100mm

Perfect for flush along side sanding.



SPECIFICATIONS

Belt Size	100mm x 610mm
Belt Speed	350 m/min
Net Weight	7.3kg
Power Supply Cord	5m

CB155
1,040W



Model: 9403

9403 100mm

Powerful motor for high production use.



SPECIFICATIONS

Belt Size	100mm x 610mm
Belt Speed	500 m/min
Net Weight	5.7kg
Power Supply Cord	5m

CB304
1,200W

BLOWERS

UB1102

(Without dust bag)

High output air volume.



SPECIFICATIONS

Air Volume	4.1m³/min.
Air Pressure	5.7kPa
No Load Speed	16,000 r/min
Net Weight	2.0kg
Power Supply Cord	2.5m

CB304
600W



Model: UB1102

UB1103

(Variable speed with dust bag)

Powerful Motor.



SPECIFICATIONS

Air Volume	0-4.1m³/min
Air Pressure	0 - 5.7kPa
No Load Speed	0 - 16,000 r/min
Net Weight	2.0kg
Power Supply Cord	2.5m

CB304
600W

HEAT GUN

HG551VK

Temperature controlled by potentiometer.



SPECIFICATIONS

Air Temperature	100°C-550°C
Air Flow	250-500 l/min
Net Weight	0.7kg

1,800W

BRAD NAILERS

AF505

18 Gauge
Pneumatic
Brad Nailer

F-Type.



SPECIFICATIONS

Nail Length	15mm-50mm
Gauge	18Ga
Magazine Capacity	100pcs
Operating Air Pressure	60 - 115 PSI
Net Weight	1.4kg



AF600

16 Gauge
Pneumatic
Brad Nailer

T-Type.



SPECIFICATIONS

Nail Length	20mm-64mm
Gauge	16Ga
Magazine Capacity	100pcs
Operating Air Pressure	72.5-116 PSI
Net Weight	1.6kg



CIRCULAR SAWS

SP6000J 165mm

Plunge Cut Circular Saw

High accuracy clean cutting.

Supplied with: 1.4m rail and 2 x clamps.

SPECIFICATIONS

Blade Diameter	165mm
Bore Size	20mm
Max. Cutting Capacity	
At 0°	56mm
At 45°	40mm
At 48°	38mm
No Load Speed	2,000-5,800 r/min
Net Weight	4.4kg
Power Supply Cord	2.5m



CB304
1,300W

Clean Cutting

- Splinter-free Cutting.
- Connectable to Vacuum Cleaner.

*Standard with Blade Part No. B-07353

WOOD / ALUMINIUM CUTTING



Model: SP6000J

INDUSTRIAL POWER TOOLS

WOOD CUTTING

HS7601 190mm with TCT blade

Compact and lightweight
with new aesthetic
design.

SPECIFICATIONS

Blade Diameter	190mm
Max. Cutting Capacity	
At 0°	66mm
At 45°	46mm
No Load Speed	5,200 r/min
Net Weight	4.0kg
Power Supply Cord	2.5m



*Standard with Blade Part No. B-02939

WOOD CUTTING

N5900B 235mm with TCT blade

A hardworking saw with the power
to rip through most materials.

SPECIFICATIONS

Blade Diameter	235mm
Bore Size	30mm
Max. Cutting Capacity	
At 0°	85mm
At 45°	60mm
At 50°	53mm
No Load Speed	4,100 r/min
Net Weight	6.8kg
Power Supply Cord	2.5m



*Standard with Blade Part No. A-89866

WOOD CUTTING

5903RK 235mm with TCT blade

With anti-kickback
riving knife.

SPECIFICATIONS

Blade Diameter	235mm
Bore Size	30mm
Max. Cutting Capacity	
At 0°	85mm
At 45°	64mm
No Load Speed	4,500 r/min
Net Weight	7.2kg
Power Supply Cord	2.5m



*Standard with Blade Part No. A-89866

WOOD CUTTING

HS0600 270mm with TCT blade

Enables single-pass cutting
of 4x materials.

SPECIFICATIONS

Blade Diameter	260-270mm
Max. Cutting Capacity	
At 0°	97mm
At 45°	69mm
No Load Speed	4,100 r/min
Net Weight	7.3kg
Power Supply Cord	2.5m



*Standard with Blade Part No. B-12859

WOOD CUTTING

5143R 355mm with TCT blade

130mm cutting
capacity.

SPECIFICATIONS

Blade Diameter	355mm
Bore Size	30mm
Max. Cutting Capacity	
At 0°	130mm
At 45°	90mm
No Load Speed	2,700 r/min
Net Weight	14kg
Power Supply Cord	5m



*Standard with Blade Part No. A-80014

METAL CUTTING

4131 185mm with TCT blade for mild steel

Cuts steel up to 6mm thick
with minimal burrs and burns.

SPECIFICATIONS

Blade Diameter	185mm
Bore Size	30mm
Max. Cutting Capacity	63mm
No Load Speed	3,500 r/min
Net Weight	5.1kg
Power Supply Cord	2.5m



*Standard with Blade Part No. B-03931

CUT-OFF SAWS METAL CUTTING

LW1401 355mm with abrasive wheel

Powerful 2,200W motor
delivers 3,800 r/min
for superior performance
and durability.

SPECIFICATIONS

Wheel Diameter	355mm
No Load Speed	3,800 r/min
Net Weight	18.3kg
Power Supply Cord	2.5m



COLD METAL CUTTING

LC1230 305mm with TCT blade for mild steel

"Cold" cutting for extra safety
and virtually burr-free cuts.

SPECIFICATIONS

Blade Diameter	305mm
Bore Size	25.4mm
Max. Cutting Capacity	
At 0°	115mm
At 45°	75mm x 150mm
	90mm
	85mm x 85mm
No Load Speed	1,300 r/min
Net Weight	19.3kg
Power Supply Cord	2.5m



*Standard with Blade Part No. A-87242

INDUSTRIAL POWER TOOLS

MITRE SAWS WOOD / ALUMINIUM CUTTING


LS0815FL 216mm Double Slide Compound Mitre Saw with TCT wood cutting blade

High dust extraction for
clean work environment.

SPECIFICATIONS

Blade Diameter	216mm
Max. Cutting Capacity	
At 0°	65mm x 305mm
At 45°	50mm x 305mm
No Load Speed	5,000 r/min
Net Weight	14.1kg
Power Supply Cord	2.5m

*Standard with Blade Part No. B-39506



LS1040 255mm Compound Mitre Saw with TCT wood cutting blade

Bevel cuts up
to 45° left.

SPECIFICATIONS

Blade Diameter	255mm - 260mm
Bore Size	25.4mm
Max. Cutting Capacity with 255mm Blade	
At 0°	90.5mm x 95mm
At 45°	90.5mm x 67mm
No Load Speed	4,600 r/min
Net Weight	12.4kg
Power Supply Cord	2.5m

*Standard with Blade Part No. A-83696




LS1018L 255mm Double Slide Compound Mitre Saw with TCT wood cutting blade

Bevel cutting 45
degrees L + R.

SPECIFICATIONS

Blade Diameter	255-260mm
Bore Size	30mm
Max. Cutting Capacity with 255mm Blade	
At 0°	91mm x 305mm
At 45°	91mm x 215mm
No Load Speed	4,300 r/min
Net Weight	20.6kg
Power Supply Cord	2.5m

*Standard with Blade Part No. JM23100005




LS1019L 260mm Double Slide Compound Mitre Saw with TCT wood cutting blade

Single sliding system
enables smooth operation
to produce superior cuts.

SPECIFICATIONS

Blade Diameter	260mm
Max. Cutting Capacity (Bevel / Mitre)	
At 90°/90°	68mm / 310mm
At 90°/90°	91mm / 279mm
At 90°/45°LR	68mm / 218mm
At 90°/45°LR	91mm / 197mm
No Load Speed	3,200 r/min
Net Weight	26.3kg
Power Supply Cord	2.5m



LS1219L 305mm Slide Compound Mitre Saw

Large turn base
supports workpiece
securely for
increased stability.

SPECIFICATIONS

Blade Diameter	305mm
Mitre Angle	60°L / 60°R
Max. Cutting Capacity with 305mm Blade	
At 90°	107mm x 363mm
At 45°	107mm x 255mm
No Load Speed	3,200 r/min
Net Weight	29.3kg
Power Supply Cord	2.5m



MITRE / TABLE SAW

LF1000 260mm Flip-Over Saw

Compact fold
away legs allow
easy transport
to job site.

SPECIFICATIONS

Blade Diameter	260mm
Bore Size	30mm
Max. Cutting Capacity	
At 0° Table	70mm
Mitre	68mm x 155mm
At 45° Table	32mm
Mitre	68 x 95mm
Bevel	50 x 140mm
No Load Speed	2,700 r/min
Net Weight	36kg
Power Supply Cord	2.5m

*Standard with Blade Part No. D-46408



TABLE SAW

MLT100 255mm Table Saw

Optional WST03
Stand for MLT100 Table Saw.

SPECIFICATIONS

Blade Diameter	255mm
Bore Size	30mm
Max. Cutting Capacity	
At 0°	91mm
At 45°	63mm
No Load Speed	4 300 r/min
Net Weight	34.1kg
Power Supply Cord	2.5m
Carbon Brush	JM23000123

*Standard with Blade Part No. D-46408



DIAMOND TOOLS WET CUTTING

4107R 180mm without blade

Quick and clean
cutting.

SPECIFICATIONS

Blade Diameter	180mm
Max. Cutting Capacity	60mm
No Load Speed	5,000 r/min
Net Weight	6.6kg
Power Supply Cord	5m



DOUBLE BLADE WALL CHASER

SG1251J 125mm Two Blades Included

Clean, compact
& comfortable.

SPECIFICATIONS

Blade Diameter	125mm
Bore Size	22.23mm
Cutting Depth	0 - 30mm
Possible Adjustment of Cutting Width	6 - 30mm
No Load Speed	10,000 r/min
Net Weight	4.5kg
Power Supply Cord	5m

*Standard with Diamond Blade Part No. A-80438



DRY CUTTING

4114S 355mm Electric Power Cutter without blade

High torque delivered
at low motor speed.

SPECIFICATIONS

Blade Diameter	355mm
Bore Size	25.4mm
Max. Cutting Capacity	125mm
No Load Speed	3,500 r/min
Net Weight	10.8kg
Power Supply Cord	2.5m



LS1219L Slide Compound Mitre Saw **new**

High Precision Cutting

One-touch sliding can be easily done by removing/ inserting the lock pin.

Independent laser switch (LS1219L only)

Laser marker

Excellent sliding durability of safety cover

Front knob for easy bevel angle adjustment

Integrated guide fences

Single sliding system enables smooth operation to produce superior cuts

DXT

changed from 25mm to 30mm. Moreover, by redesigning Arm section shape, the precision at bevel cutting is increased.

Sliding on pipe
Ø30mm

Integration of Guide fence and Lower fences provides the rigidity more than the separation structure.

INDUSTRIAL POWER TOOLS

CONCRETE PLANER

PC5001C 125mm Concrete Planer

Most suitable for planing concrete.

Capable of planing flush to corners.

With off-set diamond wheel.

SPECIFICATIONS

Wheel Diameter	125mm
No Load Speed	10,000 r/min
Net Weight	5.1kg
Power Supply Cord	5m



1,400W

DIAMOND CORE DRILL

8406 13mm Gear Chuck Diamond Core Hammer Drill

Fast drilling in ferro concrete or brick.



SPECIFICATIONS

Drilling Capacities	
Concrete (with Diamond Core Bit Dry)	152mm
Steel	13mm
Wood	30mm
No Load Speed	0 - 1,500 r/min
Impacts per Minute	0 - 22,500
Net Weight	3.7kg
Power Supply Cord	2.5m



850W

DIE GRINDERS

GD0603 6mm

Easy handling, compact die grinder with new aesthetic design.



Standard with 6mm collet

SPECIFICATIONS

Collet Capacity	6mm
No Load Speed	28,000 r/min
Net weight	0.97kg
Power Supply Cord	2.5m



240W

DIE GRINDERS

GD0600 6mm

Small circumference housing for easy handling.



Standard with 6mm collet

SPECIFICATIONS

Collet Capacity	6mm
No Load Speed	25,000 r/min
Net weight	1.7kg
Power Supply Cord	2.5m



400W

HIGH SPEED

GD0800C 6mm


High-speed die grinder with maximum 8mm collet capacity.



Standard with 6mm collet

SPECIFICATIONS

Collet Capacity	6mm
Optional Collet	8mm
Max. Bit Dia.	25mm
No Load Speed	7,000 - 28,000 r/min
Net Weight	1.7kg
Power Supply Cord	2.5m



750W

HIGH SPEED

GD0801C 6mm


Easy-to-operate paddle type on/off switch.



Standard with 6mm collet

SPECIFICATIONS

Collet Capacity	6mm
Optional Collet	8mm
No Load Speed	7,000 - 29,000 r/min
Net Weight	2.0kg
Power Supply Cord	2.5m



750W

LOW SPEED

GD0810C 6mm

With high torque, ideal for grinding internal surfaces removing paint etc. using flap wheel discs.



Standard with 6mm collet

SPECIFICATIONS

Collet Capacity	6mm
Optional Collet	8mm
Max. Bit Dia.	50mm
No Load Speed	1,800 - 7,000 r/min
Net Weight	1.7kg
Power Supply Cord	2.5m



750W

LOW SPEED

GD0811C 6mm

Easy-to-operate paddle type on/off switch.



Standard with 6mm collet

SPECIFICATIONS

Collet Capacity	6mm
Optional Collet	8mm
No Load Speed	1,800 - 7,000 r/min
Net Weight	2.0kg
Power Supply Cord	2.5m



750W



Model: GD0811C

INDUSTRIAL POWER TOOLS

DRILLS - ROTARY (NON HAMMER)

TD0101F 6.35mm Impact Driver

Compact design for perfect handling.

* Impact Driver is sold without bits.

SPECIFICATIONS

Capacity	
Machine Screw	M4-M8
Standard Bolt	M5-M14
High Strength Bolt	M5-M10
Coarse Thread	22-90mm
Driving Shank (Hex)	6.35mm
Impact per Minute	0 - 3,200 i/min
No Load Speed	0 - 3,600 r/min
Max Fastening Torque	100Nm
Net Weight	0.99kg
Power Supply Cord	2.5m



DP2010 6.5mm Gear chuck

Compact, yet with high power. Ideal for high speed drilling into thin material.

SPECIFICATIONS

Drilling Capacity	
Steel	6.5mm
Wood	15mm
No Load Speed	0 - 4,200 r/min
Net Weight	1.0kg
Power Supply Cord	2m



6411 10mm Gear Chuck

Compact & lightweight yet powerful.

SPECIFICATIONS

Drilling Capacity	
Steel	10mm
Wood	25mm
No Load Speed	3,400 r/min
Net Weight	1.3kg
Power Supply Cord	2m



DRILLS - ROTARY (NON HAMMER)

DA3010F Angle Drill 10mm Gear Chuck

Ideal for close quarter drilling - 66mm head height.




SPECIFICATIONS

Drilling Capacity	
Steel	10mm
Wood	25mm
No Load Speed	0 - 2,400 r/min
Net Weight	1.6kg
Power Supply Cord	2.5m



(NON HAMMER)

Model: DA3010F

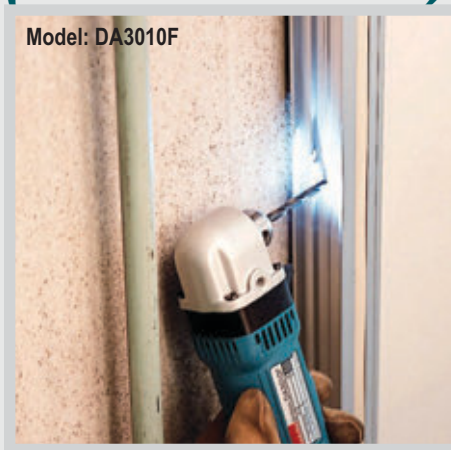

6300-4 16mm Gear Chuck

4-speed (650 / 700 / 1,250 / 1,500 r/min) drilling for a variety of materials.



SPECIFICATIONS

Drilling Capacity	
Steel	16mm
Wood	45mm
No Load Speed	650 / 700 / 1,250 / 1,500 r/min
Net Weight	2.9kg
Power Supply Cord	2.5m



DRILLS - ROTARY (NON HAMMER)

DP4002 13mm Gear Chuck

Extra powerful motor provides the highest torque in its class.



SPECIFICATIONS

Drilling Capacity	
Steel	13mm
Wood	38mm
No Load Speed	0 - 600r/min
Net Weight	2.7kg
Power Supply Cord	2.5m



(NON HAMMER)

DS4012 13mm Gear Chuck

360 degree rotatable D-handle with 24 positive stops for multi-position operation.



SPECIFICATIONS

Drilling Capacity	
Steel	13mm
Wood	36mm
No Load Speed	0 - 600r/min
Net Weight	2.8kg
Power Supply Cord	2.5m



DA4031 13mm Gear Chuck

Angle drill with rear handle that swivels 90 degrees right and left by one push of a button to drill in any position.



SPECIFICATIONS

Drilling Capacity	
Steel	13mm
Wood (auger bit)	38mm
Wood (self-feed bit)	Hi:65mm Lo:118mm
No Load Speed (r/min)	Hi:1,200 Lo:300
Net Weight	6.3kg
Power Supply Cord	2.5m



IMPACT DRILLS (WITH HAMMER ACTION)

HP1230 10mm Gear Chuck

High quality aluminium gear housing provides toughness.

SPECIFICATIONS

Drilling Capacities	
Concrete	12mm
Steel	10mm
Wood	15mm
No Load Speed	0 - 2,900 r/min
Impacts per Minute	0 - 31,900
Net Weight	1.7kg
Power Supply Cord	2m



HP1640 13mm Gear Chuck

Dual purpose for "rotation only" or "rotation with hammering."

SPECIFICATIONS

Drilling Capacities	
Concrete	16mm
Steel	13mm
Wood	30mm
No Load Speed	0 - 2,800 r/min
Impacts per Minute	0 - 44,800
Net Weight	2.0kg
Power Supply Cord	2m



INDUSTRIAL POWER TOOLS

IMPACT DRILLS (WITH HAMMER ACTION)

HP1630 13mm Gear Chuck

High power motor.

SPECIFICATIONS

Drilling Capacities	
Concrete	16mm
Steel	13mm
Wood	30mm
No Load Speed	0 - 3,200 r/min
Impacts per Minute	0 - 48,000
Net Weight	2.1kg
Power Supply Cord	2m

710W

HP2050 13mm Gear Chuck

2-Speed
Var & Rev

Compact body with
durable metal gear housing.

SPECIFICATIONS

Drilling Capacities	
Concrete	20mm
Steel	Hi : 8mm Lo : 13mm
Wood	Hi : 25mm Lo : 40mm
No Load Speed	Hi : 0 - 2,900 r/min Lo : 0 - 1,200 r/min
Impacts per Minute	Hi : 0 - 58,000 Lo : 0 - 24,000
Net Weight	2.5kg
Power Supply Cord	2.5m

720W

HP2051 13mm Keyless Chuck

SPECIFICATIONS

Drilling Capacities	
Concrete	20mm
Steel	Hi: 8mm Lo: 13mm
Wood	Hi: 25mm Lo: 40mm
No Load Speed	Hi: 0 - 2,900 r/min Lo: 0 - 1,200 r/min
Impacts per Minute	Hi: 0 - 58,000 Lo: 0 - 24,000
Net Weight	2.5kg
Power Supply Cord	2.5m

720W

HP2010N 13mm Gear Chuck

Extra Heavy Duty Industrial metal gear housing
Variable Speed R&L for long lasting durability.
2-Speed

SPECIFICATIONS

Drilling Capacities	
Concrete	20mm
Steel	13mm
Wood	40mm
No Load Speed	Hi: 0 - 2,300 r/min Lo: 0 - 900 r/min
Impacts per Minute	Hi: 0 - 46,000 Lo: 0 - 18,000
Net Weight	2.9kg
Power supply cord	2.5m

750W



Model: HP2070

HP2070 13mm Gear Chuck

Heavy Duty High power in a
Variable Speed R&L slender & compact
2-Speed body.

SPECIFICATIONS

Drilling Capacities	
Concrete	20mm
Steel	Hi: 8mm Lo: 16mm
Wood	Hi: 25mm Lo: 40mm
No Load Speed	Hi: 0 - 2,900 r/min Lo: 0 - 1,200 r/min
Impacts per Minute	Hi: 0 - 58,000 Lo: 0 - 24,000
Net Weight	2.5kg
Power Supply Cord	2.5m

1,010W

JIG SAWS & RECIPRO SAWS

4329K



Medium duty model
with 450W continuous
input.

SPECIFICATIONS

Length of Stroke	18mm
Max. Cutting Capacities	
In Wood	65mm
In Steel	6mm
Strokes per Minute	500 - 3,100
Net Weight	1.9kg
Power Supply Cord	2.0m

450W

JV0600K



3 Orbital settings
and straight cutting.

Toolless blade
change system.

SPECIFICATIONS

Length of Stroke	23mm
Max. Cutting Capacities	
In Wood	90mm
In Steel	10mm
Strokes per Minute	500 - 3,100
Net Weight	2.4kg
Power Supply Cord	2.5m

650W

4350FCT

Electronic control and
speed dial.



Toolless blade
change system.

SPECIFICATIONS

Length of Stroke	26mm
Max. Cutting Capacities	
In Wood	135mm
In Steel	10mm
Strokes per Minute	800 - 2,800
Net Weight	2.6kg
Power Supply Cord	2.5m

720W

4351FCT

With electronic
speed control
and speed dial.

Toolless blade
change system.



SPECIFICATIONS

Length of Stroke	26mm
Max. Cutting Capacities	
In Wood	135mm
In Steel	10mm
Strokes per Minute	800 - 2,800
Net Weight	2.5kg
Power Supply Cord	2.5m

720W

Model: JR3070CT



JR3070CT Recipro Saw, Orbital

Extra-low vibration
and extra power.



SPECIFICATIONS

Max. Cutting Capacities	
In Pipe	130mm
In Wood	255mm
Length of Stroke	32mm
Strokes per Minute	0 - 2,800
Net Weight	4.6kg
Power Supply Cord	2.5m

1,510W

INDUSTRIAL POWER TOOLS

METAL WORKING TOOLS NIBBLERS

JN1601 1.6mm



Precise, burr-free curved and straight cuts.

SPECIFICATIONS

Max. Cutting Capacities	
Mild Steel up to 400 N/mm ²	1.6mm
Stainless Steel up to 600 N/mm ²	1.2mm
Aluminium up to 200 N/mm ²	2.5mm
Minimum Cutting Radius	
Outside Edge	50mm
Inside Edge	45mm
Strokes per Minute	2,200
Net Weight	1.6kg
Power Supply Cord	2m



CB410

550W

JS1601 1.6mm

Straight Shear



Ingenious aesthetic design provides more control and maneuverability.

SPECIFICATIONS

Max. Cutting Capacities	
Mild Steel up to 400 N/mm ²	1.6mm
Stainless Steel up to 600 N/mm ²	1.2mm
Aluminium up to 200 N/mm ²	2.5mm
Minimum Cutting Radius	250mm
Strokes per Minute	4,500
Net Weight	1.4kg
Power Supply Cord	2.5m



CB459

380W

MULTI TOOL, RANDOM ORBIT & FINISHING SANDERS

TM3000CX2 Multi Tool

With oscillating multi tool accessories.



SPECIFICATIONS

Strokes per Minute	6,000 - 20,000
Net Weight	1.4kg
Power Supply Cord	5m



CB419

320W

BO4900 1/2 Sheet

Minimized vibration for reduced operator fatigue.



SPECIFICATIONS

Pad Size	115mm x 229mm
Abrasive Paper Size	115mm x 232mm
Orbits per Minute	10,000
Net Weight	2.7kg
Power Supply Cord	2.5m



330W

BO4555 1/4 Sheet

Powerful motor with low vibration & low noise.



SPECIFICATIONS

Pad Size	112mm x 102mm
Abrasive Paper Size	114mm x 140mm
Orbits per Minute	14,000
Net Weight	1.1kg
Power Supply Cord	2m



200W

9046 1/2 Sheet

Powerful performance for pro's needs.



SPECIFICATIONS

Pad Size	115mm x 229mm
Abrasive Paper Size	115mm x 280mm
Orbits per Minute	6,000
Net Weight	3.1kg
Power Supply Cord	2.5m



600W

BO3710 1/3 Sheet

Ergonomic tool body provides sure grip and easy handling.



SPECIFICATIONS

Pad Size	92mm x 185mm
Abrasive Paper Size	93mm x 228mm
Orbits per Minute	11,000
Net Weight	1.6kg
Power Supply Cord	2m



190W

BO5031 125mm

Powerful motor and high durability.



SPECIFICATIONS

Pad Diameter	123mm
Abrasive Disc Diameter	125mm
Orbits per Minute	4,000 - 12,000
Net Weight	1.3kg
Power Supply Cord	2.0m



300W

Model: JN3201J



JN3201J 3.2mm

Robust design with elastomer coated handle provides easy operation.

SPECIFICATIONS

Max. Cutting Capacities	
Mild Steel up to 400 N/mm ²	3.2mm
Stainless Steel up to 600 N/mm ²	2.5mm
Aluminium up to 200 N/mm ²	3.5mm
Minimum Cutting Radius	
Outside Edge	128mm
Inside Edge	120mm
Strokes per Minute	1,300
Net Weight	3.4kg
Power Supply Cord	2.5m



CB304

710W

JS1602 1.6mm

Straight Shear



Slim motor housing and rear cover provides more control and better maneuverability.

SPECIFICATIONS

Max. Cutting Capacities	
Mild Steel up to 400 N/mm ²	1.6mm
Stainless Steel up to 600 N/mm ²	1.2mm
Aluminium up to 200 N/mm ²	2.5mm
Minimum Cutting Radius	30mm
Strokes per Minute	4,000
Net Weight	1.6kg
Power Supply Cord	2.5m



CB459

380W

JS3201J 3.2mm

Straight Shear



Robust design with elastomer coated handle provides easy operation.

SPECIFICATIONS

Max. Cutting Capacities	
Mild Steel up to 400 N/mm ²	3.2mm
Stainless Steel up to 600 N/mm ²	2.5mm
Aluminium up to 200 N/mm ²	4.0mm
Minimum Cutting Radius	50mm
Strokes per Minute	1,600
Net Weight	3.4kg
Power Supply Cord	2.5m



CB303

710W

INDUSTRIAL POWER TOOLS

RANDOM ORBIT & FINISHING SANDERS

BO5041 125mm

Ergonomically designed body and rotatable front grip.



SPECIFICATIONS

Pad Diameter	123mm
Abrasive Disc Diameter	125mm
Orbits per Minute	4,000 - 12,000
Net Weight	1.4kg
Power Supply Cord	2.0m

300W

BO6030 150mm

Exceptionally low vibration, yet aggressive sanding.



SPECIFICATIONS

Pad Diameter	150mm
Abrasive Disc Diameter	150mm
Orbits per Minute	4,000 - 10,000
Orbit Diameter	3mm
Net Weight	2.4kg
Power Supply Cord	2.5m

310W

BO6050J 150mm

Ergonomically designed palm grip.



Two sanding modes:
1 - Finish sanding and buffing.
2 - Sanding and polishing.

SPECIFICATIONS

Pad Diameter	150mm
Abrasive Disc Diameter	150mm
Orbits per Minute	1,600 - 6,800
Sanding Strokes per Min	3,200 - 13,600
Orbit Diameter	5.5mm
Net Weight	2.6kg
Power Supply Cord	2.5m

750W

PLANERS & THICKNESSER

KP0800K 82mm

New aesthetic design incorporating safety foot.

Reversible mini TCT blades.



SPECIFICATIONS

Planing Width	82mm
Max Planing Depth	2.5mm
No Load Speed	17,000r/min
Net Weight	2.6kg
Power Supply Cord	2.5m

620W

KP0810K 82mm

Reversible mini TCT blades.

Lightweight design for easy handling.



SPECIFICATIONS

Planing Width	82mm
Max Planing Depth	4mm
No Load Speed	16,000r/min
Net Weight	3.3kg
Power Supply Cord	2.5m

850W

2012NB 304mm Thicknesser

- 4-Post design and diagonal cross supports for stability.



SPECIFICATIONS

Cutting Width in Pine	304mm
Cutting Depth in Pine	3mm of stock width less than 150mm 1.5mm of stock width from 150mm to 240mm
Feed Rate per Minute	8.5m
Table Size (W x L)	304 x 771mm
No Load Speed	8,500r/min
Net Weight	28.1kg
Power Supply Cord	2.5m

1,650W

ROTARY HAMMERS

HR2230 22mm 2.3 Joules

2 Operation modes

Highly durable mechanical parts, motor and carbon brushes.



SDS+

SPECIFICATIONS -

Capacities	
Concrete	22mm
Steel	13mm
Wood	32mm
No Load Speed	0 - 1050 r/min
Blows per Minute	0 - 4,050
Net Weight	2.6kg
Power Supply Cord	2.5m

710W

HR2300 23mm 2.3 Joules

2 Operation modes

Less bit wobbling.



SDS+

SPECIFICATIONS -

Capacities	
Concrete	23mm
Steel	13mm
Wood	32mm
No Load Speed	0 - 1,200 r/min
Blows per Minute	0 - 4,600
Net Weight	2.7kg
Power Supply Cord	2.5m

720W

HR2460 24mm 2.7 Joules

2 Operation modes

Same speed and torque in forward & reverse rotation.



SDS+

SPECIFICATIONS -


Capacities	
Concrete	24mm
Steel	13mm
Wood	32mm
No Load Speed	0 - 1,100 r/min
Blows per Minute	0 - 4,500
Net Weight	2.8kg
Power Supply Cord	2.5m

780W

HR2470 24mm 2.7 Joules

3 Operation modes

One-touch sliding chuck for easy bit change.

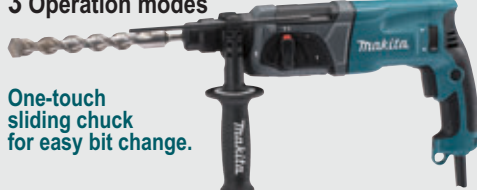

SPECIFICATIONS - SDS+

Capacities	
Concrete	24mm
Steel	13mm
Wood	32mm
No Load Speed	0 - 1,100 r/min
Blows per Minute	0 - 4,500
Net Weight	2.9kg
Power Supply Cord	2.5m

780W

HR2475 24mm 2.7 Joules

3 Operation modes

Spade handle design for heavy duty applications. Minimizes hand fatigue.



SPECIFICATIONS - SDS+

Capacities	
Concrete	24mm
Steel	13mm
Wood	32mm
No Load Speed	0 - 1,100 r/min
Blows per Minute	0 - 4,500
Net Weight	3.0kg
Power Supply Cord	4m

780W

HR2470T 24mm 2.7 Joules

3 Operation modes

Quick change drill chuck.



SPECIFICATIONS - SDS+

Capacities	
Concrete	24mm
Steel	13mm
Wood	32mm
No Load Speed	0 - 1,100 r/min
Blows per Minute	0 - 4,500
Net Weight	3.0kg
Power Supply Cord	2.5m

780W

High Power

AVT

ANTI VIBRATION TECHNOLOGY

Vibration absorbing housing***MODEL HM1812 and HM1802***

providing a practical combination of high power and low vibration.


Vibration absorbing spring
(4 places)

The machine holding section is
separated from the motor/
transmission section.



Counter weight mechanism***MODEL HM1812 ONLY***

reduces vibration during chipping operation.

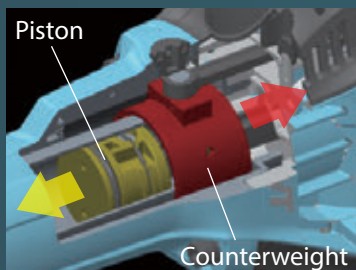

When piston is moving forward



When piston is moving back

Soft no-load function

automatically reduces the motor speed
during idling to suppress the vibration of
the machine body.

SOFT NO LOAD

MODEL HM1812 ONLY

Electric Breaker



28.6mm Hex
Shank Type

HM1812 / HM1802

Vibration level 6.5m/s^2

Counter weight mechanism

Soft no-load function


Vibration absorbing housing

Vibration level 14m/s^2

Vibration absorbing housing

and Low Vibration

The 1st electric breakers from Makita that are equipped with vibration absorbing housing, providing a practical combination of high power and low vibration.



Impact energy comparison

HM1812	72.8J
HM1802	71.4J

HIGH
Power
LOW
Vibration



Recessed hand-hold



- helps you raise a machine upright for easy transport.
- located on the both sides of the machine for convenience.

Highly durable switch



The structure of switch section has been reviewed and improved to provide enhanced durability against dust.

Electronic control



- Soft start.
- LED light to indicate energization of electric circuit.
- LED light to indicate the time to replace carbon brush.



Name plate and Serial label



placed in the position almost free from damages and scratches.

INDUSTRIAL POWER TOOLS

ROTARY HAMMERS

HR2600 26mm 2.4 Joules 2 Operation modes

Operation mode change lever positioned on the bottom of gear housing for reduced possibility of breakage.

SPECIFICATIONS - SDS+

Capacities	
Concrete	26mm
Steel	13mm
Wood	32mm
No Load Speed	0 - 1,200 r/min
Blows per Minute	0 - 4,600
Net Weight	2.8kg
Power Supply Cord	2.5m



HR2630 26mm 2.4 Joules 3 Operation modes

Easy-to-grip handle ergonomically designed for maximum power thrust.

SPECIFICATIONS - SDS+

Capacities	
Concrete	26mm
Steel	13mm
Wood	32mm
No Load Speed	0 - 1,200 r/min
Blows per Minute	0 - 4,600
Net Weight	2.8kg
Power Supply Cord	2.5m



HR2631F 26mm 2.4 Joules 3 Operation modes

Features a built-in LED job light and Anti-Vibration Technology.

SPECIFICATIONS - SDS+

Capacities	
Concrete	26mm
Steel	13mm
Wood	32mm
No Load Speed	0 - 1,200 r/min
Blows per Minute	0 - 4,600
Net Weight	2.9kg
Power Supply Cord	2.5m



HR2810 28mm 2.9 Joules 3 Operation modes

Most efficient in its class for both drilling & chipping.

SPECIFICATIONS - SDS+

Capacities	
Concrete	
(with diamond core bit)	80mm
Concrete (with TCT bit)	28mm
Steel	13mm
Wood	32mm
No Load Speed	0 - 1,100 r/min
Blows per Minute	0 - 4,500
Net Weight	3.4kg
Power Supply Cord	2.5m



HR3200C 32mm 5.5 Joules 3 Operation modes

Lightweight design featuring low vibration levels.

SPECIFICATIONS - SDS+

Capacities	
Concrete	
(with TCT bit)	32mm
Steel	13mm
Wood	32mm
No Load Speed	315-630 r/min
Impacts per Minute	1,650-3,300
Net Weight	4.8kg
Power Supply Cord	5m



HR4002 40mm 6.2 Joules

2 Operation Modes :
Hammering with rotation (for drilling)
Hammering only (for chipping & breaking)

High speed for high work efficiency.

SPECIFICATIONS - SDS MAX

Concrete (with TCT bit)	40mm
No Load Speed	680 r/min
Blows per Minute	2,500
Net Weight	6.6kg
Power Supply Cord	5m



HR4003C 40mm 11.4 Joules 2 Operation Modes : Hammering with rotation (for drilling) Hammering only (for chipping & breaking)

Most powerful and efficient in the class.

SPECIFICATIONS - SDS MAX

Concrete (with TCT bit)	40mm
No Load Speed	250 - 500 r/min
Blows per Minute	1,450-2,900
Net Weight	6.2kg
Power Supply Cord	5m



HR4013C 40mm 11.4 Joules 2 Operation Modes : Hammering with rotation (for drilling) Hammering only (for chipping & breaking)

Soft no load function reduces motor speed during idling to suppress vibration.

SPECIFICATIONS - SDS MAX

Concrete (with TCT bit)	40mm
No Load Speed	250 - 500 r/min
Blows per Minute	1,450-2,900
Net Weight	6.8kg
Power Supply Cord	5m




HR5212C 52mm 20 Joules 2 Operation Modes : Hammering with rotation (for drilling) Hammering only (for chipping & breaking)

High efficiency and unrivalled low levels of vibration.


SPECIFICATIONS - SDS MAX

Max. Bit Diameter	52mm
No Load Speed	150 - 310 r/min
Blows per Minute	1,100-2,250
Net Weight	11.9kg
Power Supply Cord	5m



DEMOLITION HAMMERS

HM0870C 11.4 Joules Light Chipper




Powerful 1,100W in compact and lightweight (5.1kg) body.

SPECIFICATIONS SDS MAX Shank

Blows per Minute	1,100 - 2,650
Net Weight	5.1kg
Power Supply Cord	5m

HM1203C 25.5 Joules Demolition Hammer



High durability and excellent demolition performance.

SPECIFICATIONS SDS MAX Shank

Blows per Minute	950 - 1,900
Net Weight	9.7kg
Power Supply Cord	5m



Model: HM1203C

INDUSTRIAL POWER TOOLS

BREAKERS

HM1307C 33.8 Joules Electric Breaker



1,510W

CB171



Durable, lightweight moulded carry case with wheels.

SPECIFICATION 30mm Hex Shank

Blows per Minute 730 - 1,450
Net Weight 15.3kg
Power Supply Cord 5m

HM1802 71.4 Joules Electric Breaker (without AVT)

Highest-in-class demolition power.



CB218

2,000W



SPECIFICATIONS 28.6mm Hex Shank

Blows per Minute 870
Net Weight 29.4kg
Power Supply Cord 5m

HM1812 72.8 Joules Electric Breaker (with AVT) **SOFT NO LOAD**

Highest-in-class demolition power with AVT (Anti-Vibration Technology).



CB218

2,000W



SPECIFICATIONS

28.6mm Hex Shank
Blows per Minute 870
Net Weight 31.3kg
Power Supply Cord 5m

ROUTERS PLUNGE TYPE

RP0900 6.35mm

Highly durable and well designed.



900W



SPECIFICATIONS

Collet Capacity 6.35mm
No Load Speed 27,000 r/min
Plunge Capacity 0-35mm
Net Weight 2.7kg
Power Supply Cord 2.5m

RP1800X 12.7mm

Ergonomically contoured handles for comfortable operation.



CB203

1,850W



SPECIFICATIONS

Collet Capacity 12.7mm
No Load Speed 22,000 r/min
Plunge Capacity 0-70mm
Net Weight 6.0kg
Power Supply Cord 2.5m

RP2301FCX 12.7mm

Linear ball bearing for super-smooth plunge action.



CB203

2,100W



SPECIFICATIONS

Collet Capacity 12.7mm
No Load Speed 9,000 - 22,000 r/min
Plunge Capacity 0 - 70mm
Net Weight 6.1kg
Power Supply Cord 2.5m

TRIMMERS

RT0700C 6.35mm

Aluminium housing and base for higher durability and accuracy.



CB410

710W



SPECIFICATIONS

Collet Capacity 6.35mm
No Load Speed 10,000 - 30,000 r/min
Net Weight 1.8kg
Power Supply Cord 2.5m

RT0700CX2 6.35mm

Aluminium housing and base for higher durability and accuracy.



CB410

710W



SPECIFICATIONS

Collet Capacity 6.35mm
No Load Speed 10,000 - 30,000 r/min
Net Weight 1.8kg
Power Supply Cord 2.5m

POLISHER

9237CB 180mm Sander-Polisher

Variable speed control by dial rotation speed is adjustable to application.



CB304

1,200W



SPECIFICATIONS

Maximum Capacities (dia.)
Abrasive Disc 180mm
Wool Pad 180mm
No Load Speed 0 - 3,200 r/min
Net Weight 3.4kg
Power Supply Cord 2.5m

SCREWDRIVERS

FS2300 **DRYWALL** For Timber Struts

Silent Clutch.



CB419

570W



SPECIFICATIONS

Capacities
Drywall Screw 5mm
Self Drilling Screw 6mm
Driving Shank 6.35mm hex
No Load Speed 0 - 2,500 r/min
Net Weight 1.6kg
Power Supply Cord 2.5m

FS4300 **DRYWALL** For Aluminium Struts

Silent Clutch.



CB419

570W



SPECIFICATIONS

Capacities
Drywall Screw 5mm
Self Drilling Screw 6mm
Driving Shank 6.35mm hex
No Load Speed 0 - 4,000 r/min
Net Weight 1.4kg
Power Supply Cord 2.5m

INDUSTRIAL POWER TOOLS

SCREWDRIVERS

FS6300 DRYWALL

For Steel Struts

Silent Clutch.

SPECIFICATIONS

Capacities	
Drywall Screw	4mm
Driving Shank	6,35mm hex
No Load Speed	0 - 6,000 r/min
Net Weight	1.4kg
Power Supply Cord	2.5m

570W

FS2500

Teks and Roofing
One touch locator.

SPECIFICATIONS

Capacities	
Drywall Screw	5mm
Self Drilling Screw	6mm
Driving Shank	6,35mm hex
No Load Speed	0 - 2,500 r/min
Net Weight	1.5kg
Power Supply Cord	2.5m

570W

FS2700

Combination (Clutch Type)
6 -Stage torque adjustment.

SPECIFICATIONS

Capacities	
Hex Screw	6mm
Drywall Screw	6mm
Self Drilling Screw	6mm
No Load Speed	0 - 2,500 r/min
Net Weight	1.8kg
Power Supply Cord	2.5m

570W

IMPACT WRENCHES

TW0200 12.7mm

200Nm

Aluminium hammer
case with high durability.

SPECIFICATIONS

Capacities	
Standard Bolt	M10-M16
High Tensile Bolt	M10-M12
Square Drive	12.7mm
Impacts per Minute	0 - 2,200
No Load Speed	0 - 2,200 r/min
Max Fastening Torque	200Nm
Net Weight	2.2kg
Power Supply Cord	2.5m

380W

TW0350 12.7mm

350Nm

Incredibly
high torque of
350Nm.

SPECIFICATIONS

Capacities	
Standard Bolt	M12-M22
High Tensile Bolt	M12-M16
Square Drive	12.7mm
Impacts per Minute	2,000
No Load Speed	2,000 r/min
Max. Fastening Torque	350Nm
Net Weight	3.0kg
Power Supply Cord	2.5m

400W

6906 19mm

588Nm

Powerful torque for super duty
applications.

SPECIFICATIONS

Capacities	
Standard Bolt	M16-M22
High Tensile Bolt	M16-M20
Square Drive	19mm
Impacts per Minute	1,600
No Load Speed	1,700 r/min
Max. Fastening Torque	588Nm
Net Weight	5.6kg
Power Supply Cord	2.5m

850W

TW1000 25.4mm

1000Nm

Robust high torque impact wrench
for heavy-duty applications.

SPECIFICATIONS

Capacities	
Standard Bolt	M24-M30
High Tensile Bolt	M22-M24
Square Drive	25.4mm
Impacts per Minute	1,500
No Load Speed	1,400 r/min
Net Weight	8.6kg
Power Supply Cord	2.5m

1,200W

LASER LEVELS AND DISTANCE MEASURES

LD050P

Laser Distance Measure

Multiple measurement
functions for increased
versatility of applications.

SPECIFICATIONS

Measuring Range	50m
Typical Measuring Tolerance	± 2.0 mm / 10m
Max Measuring Tolerance	± 3.0 mm / 10m
Ø laser Point	6mm at 10m
Laser Class	2
Laser Type	635 nm, < 1 mW
Protection Class	IP54
Net Weight (with batteries)	0.1kg



STANDARD EQUIPMENT:
Pouch, strap,
2 x AAA batteries.

LD080PI

Laser Distance Measure

Achieve the accuracy of a pro
with top-class accuracy for
maximum precision.

SPECIFICATIONS

Measuring Range	80m
Typical Measuring Tolerance	± 1.5 mm / 10m
Max Measuring Tolerance	± 2.5 mm / 10m
Ø laser Point	6mm at 10m
Laser Class	2
Laser Type	635 nm, < 1 mW
Protection Class	IP54
Net Weight (with batteries)	0.138kg



STANDARD EQUIPMENT:
Pouch, strap,
2 x AAA batteries.

Model: LD080PI



SK104Z

Cross Line Laser / Self Levelling

Robust and handy design.

Fast self-levelling time.

SPECIFICATIONS

Line Beam Direction	2 line
(Horizontal / Vertical)	
Measuring Range	Up to 15m
Detector Range	Up to 60m
Levelling Accuracy	± 3 mm / 10m
Self-Levelling Range	4 \pm 1°
Horizontal Fan Angle	180 degrees
Vertical Fan Angle	180 degrees
Laser Type	(Laser Class 2): 635nm
Protection Class	IP54
Net Weight (with batteries)	0.47kg



STANDARD EQUIPMENT:
Pouch, Magnetic
bracket, Target card,
3 x AA batteries.

Model: SK104Z





EA3502S 400mm 35mL Petrol Chain Saw

Premium hobby class chain saw for tough semi-professional use.



SPECIFICATIONS

Standard Guide Bar	400mm
Chain Blade	Pitch: 0.3/8" Gauge: 0.058"
Displacement	35mL
Engine Power	1.7kW
Fuel Mixture	50:1
Fuel Tank	0.4L
Chain Oil Tank	0.29L
Power Head Weight	4.4kg

35cc



EA4301F45C 450mm 42.4mL Petrol Chain Saw

Farmer class chain saw for tough semi-professional use.



SPECIFICATIONS

Standard Guide Bar	450mm
Chain Blade	Pitch: .325" / 3/8" Gauge: 0.050"
Displacement	42.4mL
Engine Power	2.2kW
Fuel Mixture	50:1
Fuel Tank	0.48L
Chain Oil Tank	0.28L
Power Head Weight	4.8kg

42.4cc



UC4041A 400mm Electric Chain Saw

High transmission durability.



SPECIFICATIONS

Chain Speed per Minute	870m
Guide Bar Length	400mm
Chain Blade	Pitch: 3/8" Gauge: 0.043 / 0.050"
Net Weight:	4.7kg
Power Supply Cord	0.3m



OUTDOOR POWER EQUIPMENT

Go Green

UC4051A 400mm Electric Chain Saw

Provides better maneuverability.



SPECIFICATIONS

Chain Speed per Minute	870m
Guide Bar Length	400mm
Chain Blade	
Pitch:	3/8"
Gauge:	0.050"
Chain Oil Tank	0.14L
Net Weight	5.6kg
Power Supply Cord	0.3m



DUC122Z

Cordless Chain Saw

Low noise level and zero emissions for operator comfort.



SPECIFICATIONS

Guide Bar Length	115mm
Chain Pitch	1/4"
Chain Gauge	1.3mm
Chain Speed	5.0m/s
Chain Oil Tank Volume	80 mL
Net Weight	2.6kg

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5



DUC302Z 300mm Cordless Chain Saw

EXTREME PROTECTION TECHNOLOGY



Battery capacity warning lamp.

SPECIFICATIONS

Chain Speed	500m/min
Cutting Length	300mm
Chain Pitch	3/8" or 1/4"
Net Weight	4.1kg

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5



DUC400Z 400mm Cordless Chain Saw

EXTREME PROTECTION TECHNOLOGY



SPECIFICATIONS

Chain Speed	20m/s
Cutting Length	400mm
Chain Blade Pitch	3/8" or 1/4"
Gauge	1.3mm / 1.1mm
Net Weight	4.9kg

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5



DUM604Z

Cordless Grass Shear

Both trimmer blade and shear blade can be attached.



Grass receiver for reduced grass clean-ups.

SPECIFICATIONS

Cutting Width	160mm
Strokes per min (s/min)	2,500
Net Weight	1.4 - 1.8kg

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5



DJR183Z 13mm Cordless Pruning / Recipro Saw

Cordless Pruning / Recipro Saw

Toolless blade change system allows for faster blade installation and removal.



Compact design at 392 mm.

SPECIFICATIONS

Length of Stroke	13mm
Cutting Capacity	Pipe: 50mm Wood: 50mm
Strokes per Minute	0-3,000
Net Weight	1.6kg

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5



DUR181Z Cordless String Trimmer

Well balanced tool design.



5-position pivoting head.

SPECIFICATIONS

Cutting Width	260mm
No Load Speed	7,800r/min
Net Weight	2.9kg

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5



DUR187LZ

Cordless Grass Trimmer

SPECIFICATIONS

Spindle Size	M8 x 1.25RH
Sound Power Level	84dB(A)
No Load Speed	3,500-6,000r/min
Vibration Level	2.5m/s ²
(Front Handle)	
Vibration Level	2.5m/s ²
(Rear Handle)	
Net Weight	3.1kg

Automatic speed control.

BL motor located at trimmer head for improved balance and functionality with no loss of mechanical power.

*Standard with nylon cutting head.

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5



DUR364LZ

Cordless Grass Trimmer

SPECIFICATIONS

Spindle Size	M8 x 1.25RH
Sound Power Level	92dB(A)
No Load Speed	5,000 / 6,500r/min
Vibration Level	
(Front Handle)	1.7m/s ²
Vibration Level	
(Rear Handle)	1.2m/s ²
Net Weight	4.0kg

Powered by two 18V Li-Ion batteries in series.

High power and more work amount.

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5



DUR365UZ Cordless Grass Trimmer

SPECIFICATIONS

Spindle Size	M10 x 1.25LH
Sound Power Level	86dB(A)
No Load Speed	3,500 / 5,500 6,500r/min
Vibration Level	
(Left Handle)	1.1m/s ²
Vibration Level	
(Right Handle)	0.9m/s ²
Net Weight	4.7kg

Direct drive system featuring Outer rotor brushless motor.

Multifunctional control panel for operating main/variable speed control/reversing switches.

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5

*Standard with nylon cutting head. *Blade not included.



RBC411U 40.2mL Petrol Brush Cutter

Heavy duty and robust ideal for professional brush-cutting.

*Standard with nylon cutting head.

*Blade not included.

40.2cc



SPECIFICATIONS

Displacement	40.2mL
Engine Power	1.40kW / 2.0PS
Fuel Mixture	25:1
Fuel Tank	1.1L
Spindle Size	M10 x 1.25LH
Net Weight	7.3kg



RBC413U 40.2mL Petrol Brush Cutter

Heavy duty and robust ideal for professional brush-cutting.

*Standard with nylon cutting head.

*Blade not included.

40.2cc



SPECIFICATIONS

Displacement	40.2mL
Engine Power	1.40kW / 2.0PS
Fuel Mixture	25:1
Fuel Tank	1.1L
Spindle Size	M10 x 1.25LH
Net Weight	7.1kg





DLM380DZ Cordless Lawn Mower

High maneuverability and environment-friendly.

SPECIFICATIONS

Cutting Width	380mm
Cutting Height	28-75mm
No Load Speed	3,700r/min
Box Capacity	40L
Net Weight	14.5kg

XPT
EXTREME PROTECTION TECHNOLOGY



Li-Ion Ah 6.0|5.0|4.0|3.0|1.5 **18V**

*Standard with Blade Part No. 196863-1

DLM460/1Z Coming Soon!

Cordless Lawn Mower

The 460mm heavy duty steel deck & 4 swing back blades have been designed to withstand harsh conditions.

SPECIFICATIONS **new**

Cutting Width	460mm
Cutting Height	16 - 75mm
No Load Speed	3,300r/min
Box Capacity	60L
Net Weight	27.2kg

XPT
EXTREME PROTECTION TECHNOLOGY



Li-Ion Ah 6.0|5.0|4.0|3.0|1.5 **18V**

*Standard with Blade Part No. 197761-2

DUB183Z Cordless Blower

Long leaf blower nozzle with curved at end enables to use the machine comfortably in an upright standing posture.

SPECIFICATIONS

Air Volume	2.6m³/min
Air Speed	52m/s
No Load Speed	0-18,000 r/min
Net Weight	1.7kg

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5|1.3 **18V**

DUB361Z Cordless Blower

Cordless blower powered by two 18V Li-ion batteries in series.



SPECIFICATIONS

Air Volume	Hi: 4.4m³/min Lo: 2.6m³/min
Air Speed	Hi: 93m/s Lo: 57m/s
Sound Power Level	94.7dB(A)
No Load Speed	Hi: 17,000r/min Lo: 10,000r/min
Net Weight	2.6kg

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5 **18V**

DUB362Z Cordless Blower

High air volume and air speed delivered by brushless motor and two 18V Li-ion batteries in series.



SPECIFICATIONS

Air Volume	6.9-13.4m³/min
Air Speed	27-54m/s
Sound Power Level	96dB(A)
No Load Speed	11,400-21,500 r/min
Vibration Level	0.3m/s²
Net Weight	3.5kg

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5 **18V**

DUH651Z Cordless Hedge Trimmer

Two 18V LXT Li-ion batteries deliver the power and performance for corded demands without leaving the 18V LXT platform. High maneuverability and environment-friendly. Rotatable rear handle.

SPECIFICATIONS

Blade Length	650mm
Strokes per min (s/min)	2,000-3,600
Net Weight	4.7kg

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5 **18V**

DUH523Z Cordless Hedge Trimmer

Rubberized soft grip provides comfortable and sure grip.

User-replaceable blade.



SPECIFICATIONS

Blade Length	520mm
Strokes per min (s/min)	1,350
Net Weight	3.1kg

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5 **18V**

UH6570 Electric Hedge Trimmer

More improved handling with ergonomic multi-grip system.



SPECIFICATIONS

Blade Length	650mm
Strokes per min (s/min)	3,200
Net Weight	3.7kg

CB419

Stain-free shear blade.

550W

DCU180Z Cordless Wheelbarrow Coming Soon!



SPECIFICATIONS

Max Load Capacity	130kg
Travelling Speed	Forward, High/Low:
Forward, High/Low:	0-3.5/1.5km/h
Climbing Capacity	12

Li-Ion Ah 6.0|5.0|4.0|3.0|1.5 **18V**



DCU180Z CORDLESS WHEELBARROW



Battery box is able to hold two selectable batteries.
All switch positions are all well within easy reach and are simple to use.
Dual LED job lights.
Detachable rear wheel.

Variation Options

Carrier set
Part No. 198491-8



Bucket set
Part No. 198494-2



Max. run time	120
Max load capacity	130kg (290lbs.)
Traveling speed	Forward, High/Low: 0-3.5/0-1.5km/h
	Reserve0-1km/h
Max climbing capacity	12
Dimension	When carrier is installed/ during operation: 1,315x1,060x900mm (51-3/4"x41-3/4"x35-1/2")
	When bucket installed/during operation: 1,310x820x900mm(51-1/2"x32-1/4"x35-1/2")
Net weight	Carrier type: 44.5-44.8kg (98.0-98.7lbs.)
	Bucket type39.3-39.6kg(86.5-87.2kg)



18V
LITHIUM-ION

MXT Metal Extreme Technology

MM4 Makita Mini 4-Stroke Engine

ADT Automatic Torque Drive Technology

AFT Active Feedback Sensing Technology



Anti Vibration



Auto Decompression



Auto Firing Stop



Automatic Oiling



Brake



Bevel Cutting



Bevel Cutting L45 R5



Bevel Cutting 45 LR



Built-in Light



Capacitor Discharge Ignition



Carrying Case

AVT Anti Vibration Technology



Super Joint System



Chain Brake



Constant Speed



Decompression Valve



Depth Adjusting



Double Insulation



Dust Collecting



Electronic 2-Speed



Electronic 3-Speed



Electronic 4-Speed



Hex Shank

DXT



Super Joint System II



Hook & Loop



Jig Saw Blade - Bayonet shank



Jig Saw Blade - Makita shank



Keyless Chuck



Laser Marker



Mechanical 2-Speed



Mechanical 3-Speed



Orbital Cutting



Primer Pump



Rapid Start

XPT

Extreme Protection Technology



Reversing



Revolving Hose



SDS-plus



SDS-max



Single / Sequential Firing



Soft Start



Static Free Hose



Stepless Torque Setting



Torque Limiter



Torque Setting 16



Torque Setting 18



Torque Setting 20



Torque Setting 21



Variable Speed

Rutherford

A MEMBER OF THE **Hudaco** GROUP

FOR WHOLESALE TRADE ENQUIRIES ONLY

CAPE TOWN
Tel : (021) 932-0568
Fax : (021) 932-2762

DURBAN
Tel : (031) 717-6400
Fax : (031) 709-1928

JOHANNESBURG
Tel : (011) 878-2600
Fax : (011) 873-5010

www.makita.co.za

Like Us On facebook

<http://www.facebook.com/MakitaPowerToolsSA>

DEALER STAMP

GUARANTEE: These machines have been thoroughly inspected and tested before leaving the factory and are guaranteed against defective workmanship and materials. Should any problems develop the complete machine must be returned to an Authorised Makita Service Centre. This guarantee does not apply where repairs have been made or attempted to be made to the machine by unauthorized persons and/or as a result of normal wear and tear, and/or if the machine has been abused or used for any purpose other than its intended specified use having regard to the capacity thereof. Nothing contained in this guarantee shall deprive the manufacturer and/or supplier on the one hand, and the consumer or customer on the other hand, of any rights or obligations they may have under and in terms of the Consumer Protection Act 68 of 2008 and any Regulations and amendments pertaining thereto from time to time ("the Act"), insofar as the Act may be applicable to the manufacture, sale and/or supply and purchase of the machine.

Please note: Manufacturer reserves the right to change specifications of parts and accessories without notice. Standard equipment and specifications of parts may vary in accordance with specifications issued by various countries.

This catalogue replaces the Makita Power Tool Catalogue dated April 2018 Edition and all previous Makita Tool Catalogues. Rutherford is not responsible for printing errors (E&OE)